

# Installation and Operation Manual

## PENTAGRAM Cerberus P 6341



*The latest versions of manual, drivers and applications are available on  
[www.pentagram.eu](http://www.pentagram.eu)*

2009-10-08

**NOTE!** Any information and technical data are subject to change without prior notification and/or indication in this manual.

© **2008-2009 PENTAGRAM**

All rights reserved; copying and reproduction is strictly forbidden.

# INDEX

INTRODUCTION .....	5
FEATURES .....	5
PACKAGE CONTENTS .....	7
PRODUCT OVERVIEW .....	7
IMPORTANT NOTES .....	7
FRONT PANEL .....	8
BACK PANEL .....	8
DEFAULT SETTINGS .....	9
RESETTING ROUTER .....	9
CONNECTING CERBERUS TO COMPUTER .....	9
Connecting via Ethernet Port (Ethernet Card) .....	9
Connecting via WLAN Interface (Wireless Card) .....	9
CONFIGURE TCP/IP .....	10
Windows Vista .....	10
Windows 2000/XP .....	12
Windows 95/98/Me .....	13
CONFIGURE ROUTER VIA WEB BROWSER .....	14
LOGIN .....	14
NAVIGATION .....	14
Configuration Modes .....	14
Buttons .....	14
Save Config to FLASH .....	14
BASIC .....	15
MENU .....	15
STATUS .....	16
QUICK START .....	17
<b>WAN</b> .....	17
Select WAN Port .....	17
ADSL / Select Protocol .....	17
EWAN / Select Protocol .....	20
Please wait .....	22
<b>Wireless</b> .....	22
Set Wireless configuration .....	22
WAN .....	23
WLAN .....	28
ADVANCED .....	31
MENU .....	31
STATUS .....	32
Status / ADSL Status .....	33
Status / ARP Table .....	33
Status / DHCP Table .....	34
Status / System Log .....	34
Status / Firewall Log .....	35
Status / UPnP Portmap .....	35
QUICK START .....	36
<b>WAN</b> .....	36
Select WAN Port .....	36
ADSL / Select Protocol .....	36

---

EWAN / Select Protocol .....	39
Please wait.....	41
<b>Wireless</b> .....	<b>41</b>
Set Wireless configuration.....	41
<b>CONFIGURATION</b> .....	<b>42</b>
<b>LAN</b> .....	<b>42</b>
LAN / Ethernet.....	42
LAN / IP Alias .....	42
LAN / Wireless.....	43
LAN / Wireless Security.....	44
LAN / WPS .....	47
LAN / DHCP Server.....	48
<b>WAN</b> .....	<b>50</b>
WAN / WAN Profile .....	50
WAN / ADSL Mode.....	57
<b>System</b> .....	<b>58</b>
System / Time Zone .....	58
System / Firmware Upgrade.....	58
System / Backup/Restore .....	59
System / Restart Router.....	59
System / User Management.....	60
System / Mail Alert .....	60
<b>Firewall</b> .....	<b>61</b>
Firewall / Packet Filter .....	61
Firewall / MAC Filter .....	62
Firewall / Intrusion Detection .....	63
Firewall / Block WAN PING .....	63
Firewall / URL Filter.....	64
<b>QoS</b> .....	<b>66</b>
<b>Virtual Server</b> .....	<b>69</b>
Virtual Server / Port Mapping .....	70
Virtual Server / DMZ.....	71
<b>Wake on LAN</b> .....	<b>72</b>
<b>Time Schedule</b> .....	<b>73</b>
<b>Advanced</b> .....	<b>74</b>
Advanced / Static Route.....	74
Advanced / Static ARP .....	74
Advanced / Dynamic DNS.....	75
Advanced / VLAN .....	76
Advanced / Device Management .....	77
Advanced / IGMP .....	78
Advanced / SNMP Access Control.....	78
Advanced / Remote Access .....	80
<b>TROUBLESHOOTING</b> .....	<b>81</b>
<b>USING LEDS TO DIAGNOSE PROBLEMS</b> .....	<b>81</b>
Power LED .....	81
Ethernet LEDs .....	81
DSL / Internet LED .....	81
<b>PROBLEMS WITH THE WEB INTERFACE</b> .....	<b>82</b>
<b>PROBLEMS WITH THE LOGIN USERNAME AND PASSWORD</b> .....	<b>82</b>
<b>PROBLEMS WITH LAN INTERFACE</b> .....	<b>82</b>
<b>PROBLEMS WITH WAN INTERFACE</b> .....	<b>82</b>
<b>PROBLEMS WITH THE INTERNET ACCESS</b> .....	<b>83</b>

---

## ***Introduction***

Thank you for purchasing the Cerberus P 6341 ADSL Router by PENTAGRAM. Your new router is an all-in-one unit that combines an ADSL modem, ADSL2/2+ router, Ethernet network switch and wireless Access Point to provide everything you need to get the machines on your network connected to the Internet over an ADSL broadband connection.

The Cerberus P 6341 router complies with ADSL2+ standards for deployment worldwide and supports downstream rates of up to 24 Mbps and upstream rates of up to 1 Mbps. Designed for small office, home office and residential users, the router enables even faster Internet connections. You can enjoy ADSL services and broadband multimedia applications such as interactive gaming, video streaming and real-time audio much easier and faster than ever before.

## ***Features***

- **Fast Ethernet Switch:** A 4-port 10/100Mbps fast Ethernet switch is built-in with automatic switching between MDI and MDI-X for 10Base-T and 100Base-TX ports, with auto detection allowing you to use either straight or cross-over Ethernet cables.
- **802.11n Wireless AP:** With integrated 802.11n Wireless Access Point in the router, the device offers a quick and easy access among wired network, wireless network and broadband connection (ADSL) with single device simplicity, and as a result, mobility to the users. In addition to 300 Mbps 802.11n data rate, it also interoperates backward with existing 802.11g and 802.11b equipment. The Wireless Protected Access (WPA) and Wireless Encryption Protocol (WEP) supported features enhance the security level of data protection and access control via Wireless LAN.
- **Firewall:** NAT technology supports simple firewalls and provides options for blocking access from the Internet, like Telnet, FTP, TFTP, WEB, SNMP and IGMP.
- **Network Address Translation (NAT):** Allows multiple users to access outside resources such as the Internet simultaneously with one IP address/one Internet access account. Many application layer gateways (ALG) are supported such as web browser, ICQ, FTP, Telnet, E-mail, News, Net2phone, Ping, NetMeeting, IP phone and others.
- **Universal Plug and Play (UPnP) and UPnP NAT Traversal:** This protocol is used to enable simple and robust connectivity among stand-alone devices and PCs from many different vendors, and it makes setting up a network simple and affordable. UPnP architecture leverages TCP/IP and the Web to enable proximity networking in addition to control and data transfer among networked devices. With this feature enabled, you can seamlessly connect to Net Meeting or MSN Messenger.
- **Dynamic Domain Name System (DDNS):** The Dynamic DNS service allows you to alias a dynamic IP address to a static hostname. This dynamic IP address is the WAN IP address. To use the service, you must first apply for an account from a DDNS service such as <http://www.dyndns.org/>.
- **PPP over Ethernet (PPPoE):** The Cerberus P 6341 provides an embedded PPPoE client function to establish a connection. You get greater access speed without changing the operation concept, while sharing the same ISP account and paying for one access

account. No PPPoE client software is required for the local computer. Automatic Reconnect and Disconnect Timeout (Idle Timer) functions are also provided.

- **Virtual Server:** You can specify which services are visible to outside users. The router detects an incoming service request and forwards it to the specific local computer for handling. For example, you can assign a PC in a LAN to act as a Web server inside and expose it to the outside network. Outside users can browse inside the web server directly while it is protected by NAT. A DMZ host setting is also provided for local computers exposed to the outside Internet network.
- **Dynamic Host Configuration Protocol (DHCP) Client and Server:** On a WAN site, the DHCP client obtains an IP address from the Internet Service Provider (ISP) automatically. On a LAN site, the DHCP server allocates a range of client IP addresses, including subnet masks and DNS IP addresses and distributes them to local computers. This provides an easy way to manage the local IP network.
- **Domain Name System Relay:** Domain Name System (DNS) relay provides an easy way to map a domain name with a user-friendly name such as www.google.com with an IP address. When a local machine sets its DNS server to the router's IP address, every DNS conversion request packet from the PC to this router is forwarded to the real DNS on the outside network.
- **Static and RIP1/2 Routing:** An easy static routing table or RIP1/2 routing protocol supports routing capability.
- **SNMP (Simple Network Management Protocol):** SNMP allows convenient remote management of the router.
- **Rich Packet Filtering:** This feature filters the packet based on IP addresses as well as Port numbers. Filtering packets to and from the Internet provides a higher level of security control.
- **Web-based GUI:** A web-based GUI offers easy configuration and management. User-friendly and with on-line help, it also supports remote management capability for remote users to configure and manage this product.
- **Firmware Upgradeable:** You can upgrade the router with the latest firmware through its web-based GUI.
- **Quality of Service (QoS):** Gives you full control over which types of outgoing data traffic should be given priority by the router, ensuring important data like gaming packets, customer information, or management information move through the router as lightning speed, even under heavy load. The QoS features are configurable by source IP address, destination IP address, protocol, and port. You can throttle the speed at which different types of outgoing data pass through the router, to ensure P2P users don't saturate upload bandwidth, or office browsing doesn't bring client web serving to a halt. In addition, or alternatively, you can simply change the priority of different types of upload data and let the router sort out the actual speeds.
- **High Speed Internet Access:** downstream rates of up to 24Mbps and upstream rates of up to 1Mbps. Cerberus ADSL2 Wi-Fi Plus (P6311-6) is compliant with the following standards:  
ANSI T1.413 issue 2,  
ITU-T G.992.1 (G.dmt),

ITU-T G.992.3 (ADSL2 G.dmt.bis),  
ITU-T G.992.5 (ADSL2+ G.dmt.bis.plus),  
ITU-T G.994.1 (G.hs),

- **Multi-Protocol to Establish a Connection:** The router supports following protocols to establish a connection with an ISP:  
PPPoA (PPP over ATM Adaptation Layer 5 – RFC 2364),  
PPPoE (PPP over Ethernet – RFC 2516)  
MPoA bridged or routed (Multiprotocol Encapsulation over ATM – RFC 1483/2684),  
The router also supports VC-based and LLC-based multiplexing.
- **EWAN:** Besides using ADSL to get connected to the Internet, Router offers its Ethernet port 1 as a WAN port to be used to connect to Cable Modems, VDSL, fiber optic lines and PON. This alternative, yet faster method to connect to the internet will provide users more flexibility to get online.

## Package Contents

1. PENTAGRAM Cerberus P 6341
2. Power adapter 12 V, 1 A
3. Ethernet cable (RJ-45)
4. Telephone cable (RJ-11)
5. CD
6. Quick Installation Guide
7. Antennas (3 pcs)

## Product Overview

### Important Notes



- Do not use the router in high humidity or high temperatures.
- Do not use the same power source for the router as other equipment.
- Do not open or repair the case yourself. If the router is too hot, turn off the power immediately and have it repaired at a qualified service center.
- Phone landlines are susceptible to the electrical discharges during the storms. It is recommended to disconnect the phone line from the router during storm, vacation or other longer absence.




- Avoid using this product and all accessories outdoors.
- Place the router on a stable surface.
- Only use the power adapter that comes with the package. Using a different voltage rating power adaptor may damage the router.

## Front Panel



LED	Action	Description
<b>PWR</b>	Blinking light	Router is rebooting / Firmware upgrading.
	Steady light (Red)	System initializing.
	Steady light (Green)	System is ready.
<b>LAN (1-4)</b>	Steady light (Green)	Connected to an Ethernet port (100 Mbps).
	Steady light (Orange)	Connected to an Ethernet port (10 Mbps).
	Blinking light	Transmitting / Receiving data.
<b>WLAN</b>	Steady light	Wireless connection established.
	Blinking light	Transmitting / Receiving data.
<b>WPS</b>	Blinking light	WPS is in progress.
<b>DSL</b>	Steady light	Successfully connected to an ADSL DSLAM.
<b>NET</b>	Steady light (Red)	WAN port failed to receive IP address.
	Steady light (Green)	WAN port received IP address.

## Back Panel



Label	Used for...
<b>RP-SMA Connector</b>	Connecting the external antenna
<b>DSL (RJ-11)</b>	Connecting the telephone cable (ADSL)
<b>Ethernet 1-4 (RJ-45)</b>	Connecting with computers/devices through Ethernet cable <b>Note: Only Ethernet 1 Port can be used for EWAN.</b>
<b>RESET</b>	Resetting the device.
<b>WPS</b>	Triggering Wi-Fi Protected Setup function
<b>PWR</b>	Connecting with supplied power adapter

## **Default Settings**

Before changing configuration familiarize yourself with these default settings.

IP Address	192.168.1.100
Subnet Mask	255. 255. 255.0
SSID	PENTAGRAM P6341
DHCP Server	Enabled
DHCP Server IP Address Pool	100 IP addresses from 192.168.1.101
IP Address Lease Time	43200 seconds (12 hours)
User Name	<b>admin</b>
Password	<b>pentagram</b>

It is recommended to change username and/or password as soon as possible.

If you ever forget the password to log in, you may need to reset router to restore the factory default settings. This procedure is described below.

## **Resetting router**

- Turn router on and wait about 2 minutes for router initialization.
- Press **RESET** button using the end of paper clip or other small pointed object and release it after 6 seconds to reset the router and to restore it to factory default settings. In some cases, when RESET button was pressed longer than 6 seconds, additional reboot is necessary.

## **Connecting Cerberus to Computer.**

Cerberus can be connected to computer via Ethernet or WLAN:

### **Connecting via Ethernet Port (Ethernet Card)**

All Ethernet ports of router are made in the technology, which automatically activates Crossover if necessary. Thanks to autonegotiation of connection speed the router will automatically select the maximum available speed rate. Transfer at 10/100 Mbit/s rate requires the category 5 cable wired with RJ-45 connectors. In case of "straight" cable both connectors must be crimped in standard EIA/TIA 568B. In case of Crossover cable one connector must be in standard EIA/TIA 56A, and the second in EIA/TIA 568B. After connecting the device to one of the ports, corresponding LED will begin to blink. That signals the process of the auto-checking of port and the negotiation of connection speed rate.

### **Connecting via WLAN Interface (Wireless Card)**

To connect PC to Cerberus via WLAN, Wireless Adapter must be properly installed and configured and both router and PC must be in the same subnet.




## Configure TCP/IP

After connecting the computer to the router (by LAN adapter or WLAN interface) the TCP/IP protocol should be configured. The protocol should be automatically installed together with Network card drivers. It is advised that TCP/IP should be configured to receive IP address and all the necessary network parameters from DHCP server automatically. You can find step-by-step configuration for different Windows systems below.


### Windows Vista

**Note:** Network configuration require administrator privileges. When *User Account Control* window pops up, either click Continue (Administrator user) or select Administrator user and enter valid password (Standard user).


1. Click **Start** → **Control Panel**.
2. Click **View network status and tasks**.
3. Click **View status** for appropriate connection.
4. On **General** tab, Click the **Properties** button.

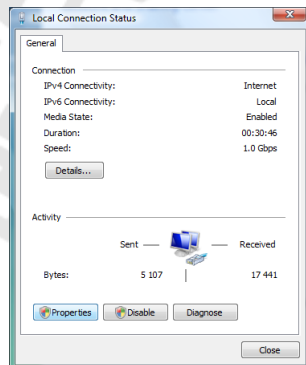

5. On **General** tab, select **Internet Protocol Version 4 (TCP/IPv4)** and click **Properties**.

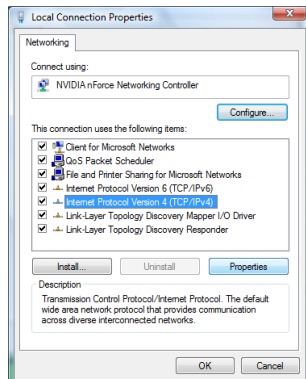


6. On **General** tab, select **Obtain an IP address automatically** and **Obtain DNS server address automatically**.
7. Click **OK** to save settings and close **Internet Protocol Version 4 (TCP/IPv4) Properties** window.

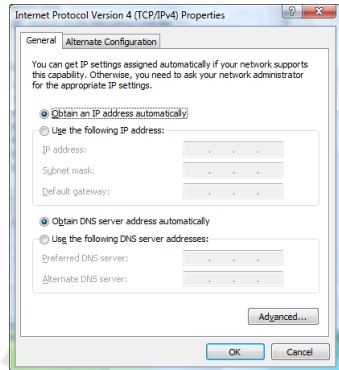


## Windows 2000/XP


1. Click **Start** → **Settings** → **Control Panel**.  
Double-click the **Network Connections** icon (2000/XP Classic view) or click **Network and Internet Connections** icon and then **Network Connections** icon (XP Default view).
2. Double-click the **Local Area Connection** icon.
3. On **General** tab, Click the **Properties** button.

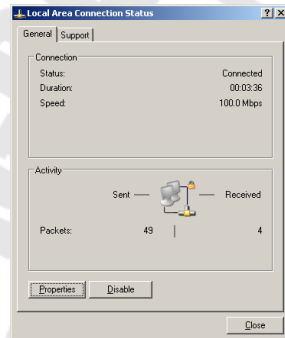

4. On **General** tab, select **Internet Protocol (TCP/IP)** and click **Properties**.



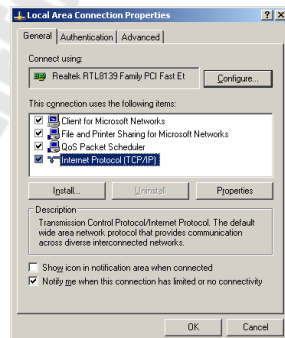


5. On **General** tab, select **Obtain an IP address automatically** and **DNS server address automatically**.
6. Click **OK** to save settings and close **Internet Protocol (TCP/IP) Properties** window.

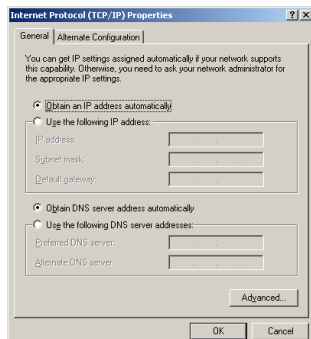

## Windows 95/98/Me

1. Click **Start** → **Settings** → **Control Panel**. Double-click the **Network** icon.
2. On **Configuration** tab, select **TCP/IP** for appropriate network adapter and click **Properties**.
3. On **IP Address** tab, select **Obtain an IP address automatically**.
4. On **DNS Configuration** tab, select **Disable DNS**.
5. Click **OK** to save settings and close **TCP/IP Properties** window.

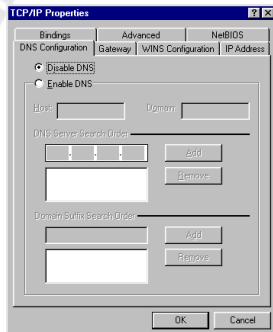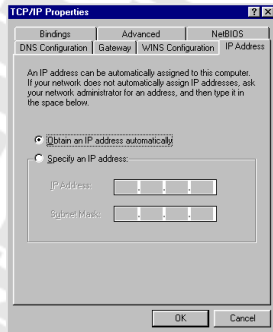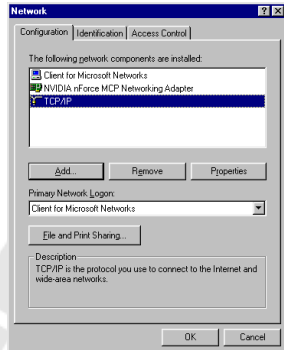

To make sure that network adapter properly obtained an IP address from router's DHCP server:


1. click **Start > Run**
2. type **cmd** (Win 2000/XP) or **command** (Win 95/98/ME) and press Enter
3. in command line type **ipconfig /all** and press Enter
4. check if the **IP Address** is **192.168.1.x**

## Configure router via web browser

Cerberus P 6341 router can be configured via web browser, which is usually integrated with operating system. Router offers clear and simple interface.

### Login

1. Launch the Web browser
2. In address bar enter the default IP address: **http://192.168.1.100**



3. Enter username and password – default **admin / pentagram**

### Navigation

#### Configuration Modes

Router supports two configuration modes: **Basic** and **Advanced**. Each mode can be assigned to certain users (based on login name), ie. **Basic** mode for Local Administrator with restricted access to router functions (only basic configuration of WAN and WLAN connection) and **Advanced** for Network Administrator with full access to all router functions (see [System / User Management](#) section for details).


### Buttons

This three buttons are available in both configuration modes at the bottom of the screen:

- **Save Settings** – Opens [Save Config to FLASH](#) page.
- **Restart Router** – Opens [System / Restart Router](#) page.
- **Logout** – Logs out currently logged user.

### Save Config to FLASH

After changing the router's configuration settings, you must save all of the configuration parameters to FLASH to avoid losing them after turning off or resetting your router. Click **Apply** to write your new configuration to FLASH.

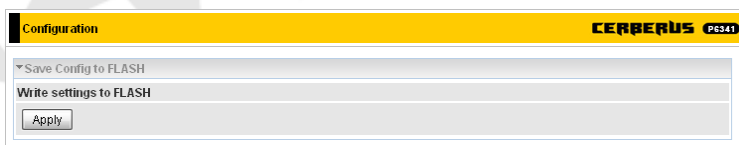

## Basic

**PENTAGRAM**  
THE PERFECT SIMPLICITY

www.pentagram.eu

**CERBERUS P6341**

**Status**

Device Information

Model Name Cerberus P 6341  
 System Up-Time 1 Day(s), 11 Hour(s) 48 min(s)  
 Hardware Version Annex A  
 Software Version 1.06d

Port Status

Ethernet	✓
ADSL	✗ 0/0 kbps
EWAN	✗
Wireless	✓

WAN

Port	Protocol/VPI/VCI	Operation	Connection	IP Address	Netmask	Gateway	Primary DNS
ADSL	PPPoA 0/35		Link Down				

(C) 2008 PENTAGRAM Europe. All rights reserved.

## Menu

In Basic configuration mode following menu items are available:

- **Advanced** – Change Configuration mode to **Advanced**.
- **Status** – Status page.
- **Quick Start** – Quick WAN and WLAN (wireless) connections configuration.
- **WAN** – WAN connection configuration.
- **WLAN** – WLAN (wireless) connection configuration.

## Status

Status		CERBERUS P6341																	
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p><b>Device Information</b></p> <table border="1"> <tr><td>Model Name</td><td>Cerberus P 6341</td></tr> <tr><td>System Up-Time</td><td>1 Day(s), 11 Hour(s) 48 min(s)</td></tr> <tr><td>Hardware Version</td><td>Annex A</td></tr> <tr><td>Software Version</td><td>1.06d</td></tr> </table> </div> <div style="width: 48%;"> <p><b>Port Status</b></p> <table border="1"> <tr><td>Ethernet</td><td>✓</td></tr> <tr><td>ADSL</td><td>✗ 0 / 0 kbps</td></tr> <tr><td>EWAN</td><td>✗</td></tr> <tr><td>Wireless ▶</td><td>✓ </td></tr> </table> </div> </div>				Model Name	Cerberus P 6341	System Up-Time	1 Day(s), 11 Hour(s) 48 min(s)	Hardware Version	Annex A	Software Version	1.06d	Ethernet	✓	ADSL	✗ 0 / 0 kbps	EWAN	✗	Wireless ▶	✓
Model Name	Cerberus P 6341																		
System Up-Time	1 Day(s), 11 Hour(s) 48 min(s)																		
Hardware Version	Annex A																		
Software Version	1.06d																		
Ethernet	✓																		
ADSL	✗ 0 / 0 kbps																		
EWAN	✗																		
Wireless ▶	✓																		
<p><b>WAN</b></p> <table border="1"> <thead> <tr> <th>Port ▶</th> <th>Protocol VPI/VCI</th> <th>Operation</th> <th>Connection</th> <th>IP Address</th> <th>Netmask</th> <th>Gateway</th> <th>Primary DNS</th> </tr> </thead> <tbody> <tr> <td>ADSL</td> <td>PPPoA 0/35</td> <td></td> <td>Link Down</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>				Port ▶	Protocol VPI/VCI	Operation	Connection	IP Address	Netmask	Gateway	Primary DNS	ADSL	PPPoA 0/35		Link Down				
Port ▶	Protocol VPI/VCI	Operation	Connection	IP Address	Netmask	Gateway	Primary DNS												
ADSL	PPPoA 0/35		Link Down																

### Device Information

**Model Name** – Router's model name.

**System Up-Time** – Router's up-time (time passed since router was powered on).

**Hardware Version** – Chipset version.

**Software Version** – Firmware version.

### Port Status

Status of Ethernet, ADSL, EWAN and Wireless connections:



Connection established.



Connection not established.



Wi-Fi network is protected.

Click on **Wireless** to go to **WLAN** configuration page.

### WAN

**Port** – Name of the WAN connection.

**Protocol VPI/VCI** – Protocol, Virtual Path Identifier and Virtual Channel Identifier.

**Operation** – Current available operation.

**Connection** – The current connection status.

**IP Address** – WAN port IP address.

**Netmask** – WAN port IP subnet mask.

**Gateway** – The IP address of the default gateway.

**Primary DNS** – The IP address of the primary DNS server.

## Quick Start

Quick Start allows to fast and easy configuration of WAN and WLAN connections. For WAN configuration you will need parameters such as username, password, protocol, VPI / VCI, encapsulation method, and so on. You can obtain all required parameters from your ISP.

## WAN

### Select WAN Port

This is the first screen you will see after clicking on Quick Start in menu.

**Connect Mode** – Select method you want to use to connect to the Internet: **EWAN** or **ADSL**.

**Continue** – Continue to EWAN or ADSL configuration (based on option selected in Connect Mode list). If you want to configure ADSL connection, ADSL line must be connected to router before you can proceed.

**Jump to Wireless setting** – Skip EWAN/ADSL configuration and go directly to WLAN configuration.

### ADSL / Select Protocol

You will see this screen if you selected **ADSL** and clicked **Continue** on previous screen (**Select WAN Port**). This screen appearance changes with selected **Protocol**:

- **PPPoE (RFC2516, PPP over Ethernet)**

PPPoE (PPP over Ethernet) provides access control in a manner similar to dial-up services using PPP.

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 20 alphanumeric characters.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Continue** – Click this button to configure and establish connection.

- **PPPoA (RFC2684, PPP over AAL5)**

PPPoA stands for Point to Point Protocol over ATM Adaptation Layer 5 (AAL5). It provides access control and billing functionality in a manner similar to dial-up services using PPP.

The screenshot shows the 'Quick Start' configuration window for Cerberus P6341. The 'WAN Port (WAN > Wireless)' section is active, and the 'Select protocol' dropdown is set to 'PPPoA (RFC2684, PPP over AAL5)'. The configuration fields are as follows:

Protocol	PPPoA (RFC2684, PPP over AAL5)
VPI / VCI	0 / 35
Username	Username
Password	*****
Encap. method	<input type="radio"/> VcMux <input checked="" type="radio"/> LLC
Auth. Protocol	Auto
IP Address	0.0.0.0 (0.0.0.0 means 'Obtain an IP address automatically')

A 'Continue' button is located at the bottom left of the configuration area.

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Continue** – Click this button to configure and establish connection.

- **MPoA (RFC 1483/RFC2684, Multiprotocol Encapsulation over AAL5)**

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single IP account, sharing the single IP address. If users on your LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Encap. mode** – Choose whether you want the device to function as bridge mode or routing mode.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Netmask** – The default netmask is **255.255.255.0**. User can change it to other such as **255.255.255.128**. Type the netmask assigned to you by your ISP (if given)

**Gateway** – Enter the IP address of the default gateway.

**Continue** – Click this button to configure and establish connection.

- **Pure Bridge**

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Continue** – Click this button to configure and establish connection.

- **PPPoE with Pass-through**

**Quick Start** CERBERUS P6341

WAN Port (WAN > Wireless)

Select protocol

Protocol	PPPoE with Pass-through
VPI / VCI	0 / 35
Username	Username
Password	*****
Service Name	
Encap. method	<input type="radio"/> VcMux <input checked="" type="radio"/> LLC
Auth. Protocol	Auto
IP Address	0.0.0.0 (0.0.0.0 means 'Obtain an IP address automatically')

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 20 alphanumeric characters.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Continue** – Click this button to configure and establish connection.

## EWAN / Select Protocol

You will see this screen if you selected **EWAN** and clicked **Continue** on previous screen (**Select WAN Port**). This screen appearance changes with selected **Protocol**:

- **Obtain an IP Address Automatically**

If ISP assigns IP address, subnet mask, gateway address, and DNS server addresses via DHCP router can automatically obtain this information.

**Quick Start** CERBERUS P6341

WAN Port (WAN > Wireless)

Select protocol

Protocol	Obtain an IP Address Automatically
----------	------------------------------------

**Protocol** – Change used protocol.

**Continue** – Click this button to configure and establish connection.

- **Fixed IP Address**

Select this option to set static IP information. You will need to enter in the IP address, Netmask, and gateway address, provided to you by your ISP. Each IP address entered in the fields must be in the appropriate IP form, which is four IP octets separated by a dot (x.x.x.x).

The screenshot shows the 'Quick Start' configuration window for 'Fixed IP Address'. The window title is 'Quick Start' and 'CERBERUS P6341'. The main heading is 'WAN Port (WAN > Wireless)'. Below this is a 'Select protocol' section with a dropdown menu set to 'Fixed IP Address'. The form fields are: 'IP Address' (0.0.0.0), 'Netmask' (empty), and 'Gateway' (empty). A 'Continue' button is at the bottom.

**Protocol** – Change used protocol.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Netmask** – The default is 0.0.0.0. User can change it to other such as 255.255.255.0. Type the subnet mask assigned to you by your ISP (if given).

**Gateway** – You must specify a gateway IP address (supplied by your ISP).

**Continue** – Click this button to configure and establish connection.

- **PPPoE**

PPPoE (PPP over Ethernet) provides access control in a manner similar to dial-up services using PPP.

The screenshot shows the 'Quick Start' configuration window for 'PPPoE'. The window title is 'Quick Start' and 'CERBERUS P6341'. The main heading is 'WAN Port (WAN > Wireless)'. Below this is a 'Select protocol' section with a dropdown menu set to 'PPPoE'. The form fields are: 'Username' (empty), 'Password' (empty), 'Service Name' (empty), 'IP Address' (0.0.0.0 with a note '(0.0.0.0' means 'Obtain an IP address automatically)'), and 'Authentication Protocol' (Auto). A 'Continue' button is at the bottom.

**Protocol** – Change used protocol.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 20 alphanumeric characters.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Authentication Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**Continue** – Click this button to configure and establish connection.

## Please wait...

After entering correct information and clicking **Continue** button on **Select Protocol** screen, router will be configured and connection established.

The screenshot shows a yellow header bar with 'Quick Start' on the left and 'CERBERUS P6341' on the right. Below the header, there is a breadcrumb trail 'WAN Port (WAN > Wireless)'. The main content area contains the text 'Please wait while the device is configured.'

If entered values was correct, following screen will appear:

The screenshot shows a yellow header bar with 'Quick Start' on the left and 'CERBERUS P6341' on the right. Below the header, there is a breadcrumb trail 'WAN Port (WAN > Wireless)'. The main content area contains the text 'Congratulations!' and 'Your WAN port has been successfully configured.' Below this text is a button labeled 'Next to Wireless'.

**Next to Wireless** – Continue to WLAN configuration.

## Wireless

### Set Wireless configuration

The screenshot shows a yellow header bar with 'Quick Start' on the left and 'CERBERUS P6341' on the right. Below the header, there is a breadcrumb trail 'Wireless (WAN > Wireless)'. The main content area is titled 'Set Wireless configuration.' and contains the following fields:

WLAN Service	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
ESSID	PENTAGRAM P6431
Channel ID	Auto
Security Mode	Disable

At the bottom of the form is a 'Continue' button.

**WLAN Service** – **Enable** or **Disable** built-in Access Point.

**ESSID** – The ESSID is the unique name of a wireless access point (AP) to be distinguished from another. For security propose, change to a unique ID name to the AP which is already built-in to the router's wireless interface. It is case sensitive and must not exceed 32 characters. Make sure your wireless clients have exactly the same ESSID as the device, in order to get connected to your network.

**Channel ID** – Select the ID channel that you would like to use.

**Security Mode** – You can disable or enable with WPA or WEP for protecting wireless network. It is recommended to enable wireless network protection (see **WLAN** section for details).

**Continue** – Save all settings and return to **Status** page.

## WAN

A WAN (Wide Area Network) is an outside connection to another network or the Internet. This screen appearance changes with selected **Main Port** and **Protocol**:

**Main Port** – Select port which will be used to connect to the Internet: **ADSL** or **EWAN**. Besides using ADSL to get connected to the Internet, router offers its Ethernet port 1 as a WAN port to be used to connect to Cable Modems, VDSL, fiber optic lines and PON. This alternative, yet faster method to connect to the internet will provide users with more flexibility to get online

**Protocol** – Protocol used by ISP.

- **ADSL / PPPoE (RFC2516, PPP over Ethernet)**  
PPPoE (PPP over Ethernet) provides access control in a manner similar to dial-up services using PPP.

The screenshot shows the 'Configuration' page for the 'CERBERUS P6341' router. The 'WAN Port' section is expanded, showing the 'WAN Connection' and 'Parameters' tabs. The 'Main Port' is set to 'ADSL' (Current Main Port: ADSL). The 'Protocol' is set to 'PPPoE (RFC2516, PPP over Ethernet)'. The 'VPI/VCI' is set to '0 / 35'. The 'Username' field contains 'Username' and the 'Password' field contains '\*\*\*\*\*'. The 'Service Name' field is empty. The 'Encap. method' has radio buttons for 'VcMux' and 'LLC', with 'LLC' selected. The 'Auth. Protocol' is set to 'Auto'. The 'IP Address' is set to '0.0.0.0' with a note: '(0.0.0.0 means 'Obtain an IP address automatically')'. An 'Apply' button is at the bottom left.

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 20 alphanumeric characters.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

• **ADSL / PPPoA (RFC2684, PPP over AAL5)**

PPPoA stands for Point to Point Protocol over ATM Adaptation Layer 5 (AAL5). It provides access control and billing functionality in a manner similar to dial-up services using PPP.

**Configuration** CERBERUS P6341

WAN Port

WAN Connection

Main Port: ADSL (Current Main Port: ADSL)

Parameters

Protocol: PPPoA (RFC2684, PPP over AAL5)

VPI / VCI: 0 / 35

Username: Username

Password: .....

Encap. method:  VcMux  LLC

Auth. Protocol: Auto

IP Address: 0.0.0.0 (0.0.0.0 means 'Obtain an IP address automatically')

Apply

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Auth. Protocol** – Default is **Chap**. Your ISP advises on using **Chap** or **Pap**.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

• **ADSL / MPoA (RFC 1483/RFC2684, Multiprotocol Encapsulation over AAL5)**

**Configuration** CERBERUS P6341

WAN Port

WAN Connection

Main Port: ADSL (Current Main Port: ADSL)

Parameters

Protocol: MPoA (RFC1483/RFC2684, Multiprotocol Encapsulation over AAL5)

VPI / VCI: 0 / 35

Encap. method:  VcMux  LLC

Encap. mode:  Bridged  Routed

IP Address: 0.0.0.0 (0.0.0.0 means 'Obtain an IP address automatically')

Netmask: 255.255.255.0

Gateway:

Apply

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single IP account, sharing the single IP address. If users on your LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Encap. mode** – Choose whether you want the device to function as bridge mode or routing mode.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Netmask** – The default netmask is **255.255.255.0**. User can change it to other such as **255.255.255.128**. Type the netmask assigned to you by your ISP (if given)

**Gateway** – Enter the IP address of the default gateway.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

- **ADSL / Pure Bridge**

The screenshot shows the 'Configuration' page for the Cerberus P6341 device. The 'WAN Port' section is expanded, showing the following settings:

- WAN Connection:** ADSL (Current Main Port: ADSL)
- Main Port:** ADSL
- Parameters:**
  - Protocol:** Pure Bridge
  - VPI/VCI:** 0 / 35
  - Encap. method:**  VcMux  LLC

An 'Apply' button is visible at the bottom of the configuration area.

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

- **ADSL / PPPoE with Pass-through**

**Configuration** CERBERUS P6341

WAN Port

WAN Connection

Main Port: ADSL (Current Main Port: ADSL)

Parameters

Protocol: PPPoE with Pass-through

VPI / VCI: 0 / 35

Username: Username

Password: \*\*\*\*\*

Service Name:

Encap. method:  VcMux  LLC

Auth. Protocol: Auto

IP Address: 0.0.0.0 (0.0.0.0 means 'Obtain an IP address automatically')

Apply

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 20 alphanumeric characters.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

- **EWAN / Obtain an IP Address Automatically**

If ISP assigns IP address, subnet mask, gateway address, and DNS server addresses via DHCP router can automatically obtain this information.

**Configuration** CERBERUS P6341

WAN Port

WAN Connection

Main Port: EWAN (Current Main Port: ADSL)

Parameters

Protocol: Obtain an IP Address Automatically

Apply Cancel

**Protocol** – Change used protocol.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

- **EWAN / Fixed IP Address**

Select this option to set static IP information. You will need to enter in the IP address, Netmask, and gateway address, provided to you by your ISP. Each IP address entered in the fields must be in the appropriate IP form, which is four IP octets separated by a dot (x.x.x.x).

The screenshot shows the 'Configuration' window for the Cerberus P6341. Under the 'WAN Port' section, the 'WAN Connection' is set to 'EWAN'. The 'Main Port' is 'EWAN' with a note '(Current Main Port : ADSL)'. In the 'Parameters' section, the 'Protocol' is set to 'Fixed IP Address'. There are empty input fields for 'IP Address', 'Netmask', and 'Gateway'. At the bottom are 'Apply' and 'Cancel' buttons.

**Protocol** – Change used protocol.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Netmask** – The default is 0.0.0.0. User can change it to other such as 255.255.255.0. Type the subnet mask assigned to you by your ISP (if given).

**Gateway** – You must specify a gateway IP address (supplied by your ISP).

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

- **EWAN / PPPoE**

PPPoE (PPP over Ethernet) provides access control in a manner similar to dial-up services using PPP.

The screenshot shows the 'Configuration' window for the Cerberus P6341. Under the 'WAN Port' section, the 'WAN Connection' is set to 'EWAN'. The 'Main Port' is 'EWAN' with a note '(Current Main Port : ADSL)'. In the 'Parameters' section, the 'Protocol' is set to 'PPPoE'. There are input fields for 'Username', 'Password', and 'Service Name'. The 'IP Address' field has a note '(0.0.0.0 means 'Obtain an IP address automatically')'. The 'Authentication Protocol' is set to 'Auto'. At the bottom are 'Apply' and 'Cancel' buttons.

**Protocol** – Change used protocol.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 20 alphanumeric characters.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Authentication Protocol** – Default is Chap. Your ISP advises on using **Chap** or **Pap**.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## WLAN

The screenshot shows the 'Configuration' page for the Cerberus P6341 router. The 'WLAN' section is expanded, showing 'Wireless Parameters' and 'Security Parameters'. The 'WLAN Service' is set to 'Enable'. The 'ESSID' is 'PENTAGRAM P6341'. 'Hide ESSID' is set to 'Disable'. The 'Regulation Domain' is 'Europe'. The 'Channel ID' is 'Auto'. The 'Security Mode' is 'Disable'. There are 'Apply' and 'Cancel' buttons at the bottom.

Wireless Parameters	
WLAN Service	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
ESSID	PENTAGRAM P6341
Hide ESSID	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Regulation Domain	Europe
Channel ID	Auto
Security Parameters	
Security Mode	Disable

### Wireless Parameters

**WLAN Service** – **Enable** or **Disable** built-in Access Point.

**ESSID** – The ESSID is the unique name of a wireless access point (AP) to be distinguished from another. For security propose, change to a unique ID name to the AP which is already built-in to the router's wireless interface. It is case sensitive and must not exceed 32 characters. Make sure your wireless clients have exactly the ESSID as the device, in order to get connected to your network. Note: ESSID is case sensitive and must not exceed 32 characters.

**Hide ESSID** – It is function in which transmits its ESSID to the air so that when wireless client searches for a network, router can then be discovered and recognized. Select **Enable** if you do not want broadcast your ESSID. When **Enable** is selected, no one will be able to locate the Access Point (AP) of your router. When **Disable** is selected, you can allow anybody with a wireless client to be able to locate the Access Point (AP) of your router.

**Regulation Domain** – There are seven Regulation Domains for you to choose from, including North America (N.America), Europe, France, etc. The Channel ID will be different based on this setting. Select region in which router will be used – broadcasting on channel unavailable for your region may be against the law.

**Channel ID** – Select the ID channel that you would like to use.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## Security Parameters

Appearance of this section depends on option selected on **Security Mode** list:

- **Disable**

Wireless network in this mode is not protected and anyone who knows ESSID can connect to this wireless network.

Security Parameters	
Security Mode	Disable

- **WPA Pre-Shared Key**

Only wireless stations with security set to WPA-PSK will be able to connect to this network.

Security Parameters	
Security Mode	WPA Pre-Shared Key
WPA Shared Key	
Group Key Renewal	3600 seconds

**Security Mode** – Change security mode.

**WPA Shared Key** – The key for network authentication. The input format is in character style and the key size should be in the range between 8 and 63 characters.

**Group Key Renewal** – The period of renewal time for changing the security key between wireless client and Access Point (AP). This process is done automatically.

- **WPA2 Pre-Shared Key**

Only wireless stations with security set to WPA2-PSK will be able to connect to this network.

Security Parameters	
Security Mode	WPA2 Pre-Shared Key
WPA Shared Key	
Group Key Renewal	3600 seconds

**Security Mode** – Change security mode.

**WPA Shared Key** – The key for network authentication. The input format is in character style and the key size should be in the range between 8 and 63 characters.

**Group Key Renewal** – The period of renewal time for changing the security key between wireless client and Access Point (AP). This process is done automatically.

- **WPA/WPA2 Pre-Shared Key**

Wireless stations with security set to both WPA-PSK or WPA2-PSK will be able to connect to this network.

Security Parameters	
Security Mode	WPA/WPA2 Pre-Shared Key
WPA Shared Key	
Group Key Renewal	3600 seconds

**Security Mode** – Change security mode.

**WPA Shared Key** – The key for network authentication. The input format is in character style and the key size should be in the range between 8 and 63 characters.

**Group Key Renewal** – The period of renewal time for changing the security key between wireless client and Access Point (AP). This process is done automatically.

- **WEP**

Security Parameters	
Security Mode	WEP <input type="button" value="v"/>
WEP Authentication	Open System <input type="button" value="v"/>
Default Used WEP Key	<input checked="" type="radio"/> 1 <input type="radio"/> 2 <input type="radio"/> 3 <input type="radio"/> 4
Passphrase (Generate Key)	<input type="text"/> <input type="button" value="WEP64"/> <input type="button" value="WEP128"/>
Key 1	Hex <input type="button" value="v"/> <input type="text"/>
Key 2	Hex <input type="button" value="v"/> <input type="text"/>
Key 3	Hex <input type="button" value="v"/> <input type="text"/>
Key 4	Hex <input type="button" value="v"/> <input type="text"/>

WEP 64 - Hex: 10 Hex codes, (1~9, a-f, A-F). EX: 11aa22cc33  
 WEP 64 - ASCII: 5 ASCII characters are required. Insert your WEP key manually. EX: 1a3eb.  
 WEP 128 - Hex: 26 Hex codes, (1~9, a-f, A-F). EX: 11aa22cc33dd44ee55effe35f  
 WEP 128 - ASCII: 13 ASCII characters are required. Insert your WEP key manually. EX: 1a3e?1dbd3ert.

**Security Mode** – Change security mode.

**WEP Authentication** – To prevent unauthorized wireless stations from accessing data transmitted over the network, the router offers secure data encryption, known as WEP. If you require high security for transmissions, there are three options to select from:


- **Open System** – No authentication is required to connect to this network.
- **Share key** – Authentication is required and is based on Share keys.
- **Both** – Used authentication method depends on wireless station security settings.

**Default Used WEP Key** – Select the encryption key ID; please refer to Key (1~4) below.

**Passphrase** – This is used to generate WEP keys automatically based upon the input string and a pre-defined algorithm in WEP64 or WEP128. You can input the same string in both the AP and Client card settings to generate the same WEP keys. Please note that you do not have to enter Key (1-4) as below when the Passphrase is enabled.

**Key (1-4)** – Enter the key to encrypt wireless data. To allow encrypted data transmission, the WEP Encryption Key values on all wireless stations must be the same as the router. There are four keys for your selection. The input format is in HEX or ASCII style, 5 and 13 ASCII characters or 10 and 26 HEX characters are required for WEP64 and WEP128 respectively no any separator is included.

## Advanced

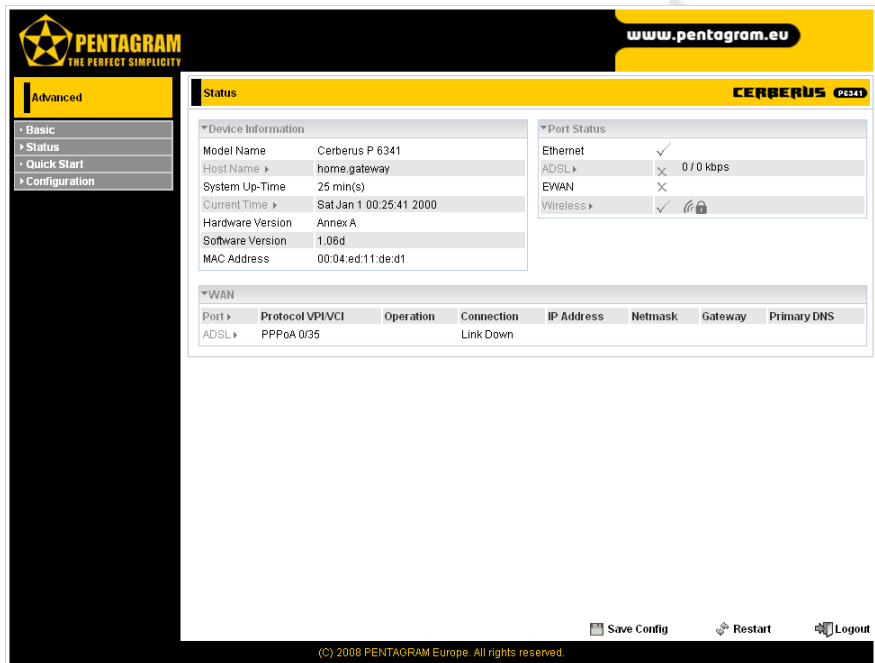

**PENTAGRAM**  
THE PERFECT SIMPLICITY

www.pentagram.eu

**Advanced**

Basic  
Status  
Quick Start  
Configuration

**Status** CERBERUS P6341

Device Information

Model Name	Cerberus P 6341
Host Name	home.gateway
System Up-Time	25 min(s)
Current Time	Sat Jan 1 00:25:41 2000
Hardware Version	Annex A
Software Version	1.06d
MAC Address	00:04:ed:11:de:d1

Port Status

Ethernet	<input checked="" type="checkbox"/>
ADSL	<input type="checkbox"/> 0/0 kbps
EWAN	<input type="checkbox"/>
Wireless	<input checked="" type="checkbox"/>

WAN

Port	Protocol	VPI/VCI	Operation	Connection	IP Address	Netmask	Gateway	Primary DNS
ADSL	PPPoA	0/35		Link Down				

Save Config Restart Logout

(C) 2008 PENTAGRAM Europe. All rights reserved.

## Menu

In Advanced configuration mode following menu items are available:

- **Basic** – Change Configuration mode to **Basic**.
- **Status** – Main status page. More detailed status pages and logs are available: **Status / ADSL Status**, **Status / ARP Table**, **Status / DHCP Table**, **Status / System Log**, **Status / Firewall Log** and **Status / UPnP Portmap**.
- **Quick Start** – Quick WAN and WLAN (wireless) connections configuration.
- **Configuration** – Router settings grouped by categories: **LAN**, **WAN**, **System**, **Firewall**, **QoS**, **Virtual Server**, **Wake on LAN**, **Time Schedule** and **Advanced**.

## Status

**Device Information**

Model Name	Cerberus P 6341
Host Name	home.gateway
System Up-Time	25 min(s)
Current Time	Sat Jan 1 00:25:41 2000
Hardware Version	Annex A
Software Version	1.06d
MAC Address	00:04:ed:11:de:d1

**Port Status**

Ethernet	✓
ADSL	✗ 0 / 0 kbps
EWAN	✗
Wireless	✓

**WAN**

Port	Protocol VPI/VCI	Operation	Connection	IP Address	Netmask	Gateway	Primary DNS
ADSL	PPPoA 0/35		Link Down				

### Device Information

**Model Name** – Router's model name.

**Host Name** – Router's name for identification purposes. Click on **Host Name** to go to [Advanced / Device Management](#) page.

**System Up-Time** – Router's up-time (time passed since router was powered on).

**Current Time** – Current date and time. Click on **Current Time** to go to [System / Time Zone](#) page.

**Hardware Version** – Chipset version.

**Software Version** – Firmware version.

**MAC Address** – Router's MAC Address.

### Port Status

Status of Ethernet, ADSL, EWAN and Wireless connections:



Connection established.



Connection not established.



Wi-Fi network is protected.

Click on **ADSL** to go to [Status / ADSL Status](#) page or click on **Wireless** to go to [LAN / Wireless](#) page.

### WAN

**Port** – Name of the WAN connection. Click on **Port** or connection name to go to [WAN / WAN Profile](#) page.

**Protocol VPI/VCI** – Protocol, Virtual Path Identifier and Virtual Channel Identifier.

**Operation** – Current available operation.

**Connection** – The current connection status.

**IP Address** – WAN port IP address.

**Netmask** – WAN port IP subnet mask.

**Gateway** – The IP address of the default gateway.

**Primary DNS** – The IP address of the primary DNS server.

## Status / ADSL Status

On this page you can find all information about ADSL connection.

Status		CERBERUS P6341
▼ ADSL Status		
Parameters		
DSP Firmware Version	DMT FwVer: 3.9.4.20_A_TC, HwVer:T14F7_5.0	
DMT Status	ADSL Down	
Operational Mode	-----	
Upstream	0 kbps	
Downstream	0 kbps	
SNR Margin (Upstream)	N/A (ADSL is not UP)	
SNR Margin (Downstream)	N/A (ADSL is not UP)	
Line Attenuation (Upstream)	N/A (ADSL is not UP)	
Line Attenuation (Downstream)	N/A (ADSL is not UP)	
<input type="button" value="Refresh"/>		

**DSP Firmware Version** – DSP code version.

**DMT Status** – Current DMT Status.

**Operational Mode** – Used ADSL standard. Click on **Operational Mode** to go to [WAN / ADSL Mode](#) page.

**Upstream** – Upstream rate.

**Downstream** – Downstream rate.

**SNR Margin (Upstream)** – This is noise margin in upstream.

**SNR Margin (Downstream)** – This is noise margin in downstream.

**Line Attenuation (Upstream)** – This is attenuation of signal in upstream.

**Line Attenuation (Downstream)** – This is attenuation of signal in downstream.

## Status / ARP Table

The router's ARP (Address Resolution Protocol) Table shows the mapping of Internet (IP) addresses to Ethernet (MAC) addresses. This is a quick way to determine the MAC address of the network interface of your PCs to use with the router's [Firewall / MAC Filter](#) function.

Status		CERBERUS P6341	
▼ ARP Table			
Wired & Wireless			
IP Address	MAC Address	Interface	Static ARP
192.168.1.103	00:19:E0:8D:BB:FA	lan	No

**IP Address** – A list of IP addresses of devices on your LAN (Local Area Network).

**MAC Address** – MAC (Media Access Control) address for each device on your LAN.

**Interface** – The interface name (on the router) that this IP Address connects to.

**Static** – Static status of the ARP table entry:

- **No** for dynamically-generated ARP table entries.
- **Yes** for static ARP table entries added by the user.

## Status / DHCP Table

Status <span style="float: right;">CERBERUS P6341</span>			
▼ DHCP Table			
Leased Table			
IP Address	MAC Address	Client Host Name	Register Information
192.168.1.101		sam-01	Expired
192.168.1.102	00:1e:8c:65:2a:d7	sam-02	Remains11:32:33
192.168.1.103	00:19:e0:8d:bb:fa	sam-03	Remains11:35:52

**IP Address** – IP addresses of devices on your LAN. Click on **IP Address** to go to [LAN / DHCP Server](#) page.

**MAC Address** – The MAC Address to which IP address is assigned.

**Client Host Name** – Expired IP addresses information.

**Register Information** – Remained DHCP lease time.


## Status / System Log

Display system logs accumulated up to the present time. You can trace historical information with this function.

Status <span style="float: right;">CERBERUS P6341</span>	
▼ System Log	
Current Time: Sat Jan 1 00:30:51 2000	
Jan 1 00:00:08	syslog: Detected TC3162 (PRID: cd01)
Jan 1 00:00:08	syslog: Enable IMEM addr=1c8000
Jan 1 00:00:08	syslog: Enable DMEM addr=1cc000
Jan 1 00:00:08	syslog: CPU revision is: 0000cd01
Jan 1 00:00:08	syslog: isTC3162L4P4: 1, dcache_size=8192, i_cache_size=32768
Jan 1 00:00:08	syslog: 32 entry TLB.
Jan 1 00:00:08	syslog: Primary instruction cache 32kb, linesize 16 bytes
Jan 1 00:00:08	syslog: Primary data cache 8kb, linesize 16 bytes
Jan 1 00:00:08	syslog: OS (11:58:35, Aug 6 2006)
Jan 1 00:00:08	syslog: ttyS00 at 0x01f00003 (irq = 0) is a tc3162_uart1
Jan 1 00:00:08	syslog: TC3162 hardware watchdog module loaded.
Jan 1 00:00:08	syslog: tc3162 flash device: 0x4000000 at 0x1fc00000.
Jan 1 00:00:08	syslog: Arm/Fujitsu Extended Query Table v1.1 at 0x0040
Jan 1 00:00:08	syslog: number of CFI chips: 1
Jan 1 00:00:08	syslog: IP: routing cache hash table of 512 buckets, 4kbytes
Jan 1 00:00:08	syslog: TCP: Hash tables configured (established 1024 bind 2048)
Jan 1 00:00:08	syslog: IP multicast router
<input type="button" value="Refresh"/> <input type="button" value="Clear"/>	

## Status / Firewall Log

Firewall Log displays log information of any unexpected action with your firewall settings. This page displays the router's Firewall Log entries. The log shows log entries when you have enabled Intrusion Detection or Block WAN PING in the **Firewall** section of the interface.

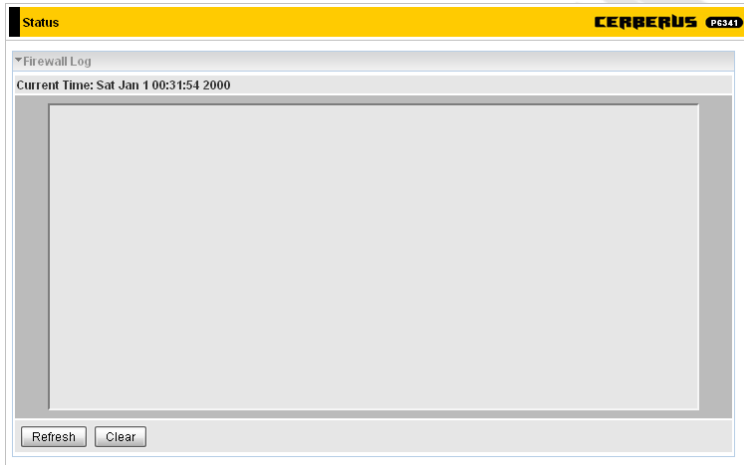

## Status / UPnP Portmap

The section lists all port-mapping established using UPnP (Universal Plug and Play). Please see the **Universal Plug and Play (UPnP)** section of this manual for more details on UPnP and the router's UPnP configuration options.

The screenshot shows the 'UPnP Portmap' section of the status page. It features a table with the following columns: Name, Protocol, External Port, Internal Port, and IP Address.

Name	Protocol	External Port	Internal Port	IP Address
------	----------	---------------	---------------	------------

## Quick Start

Quick Start allows to fast and easy configuration of WAN and WLAN connections. For WAN configuration you will need parameters such as username, password, protocol, VPI / VCI, encapsulation method, and so on. You can obtain all required parameters from your ISP.

## WAN

### Select WAN Port

This is the first screen you will see after clicking on Quick Start in menu.

The screenshot shows the 'Quick Start' configuration window for 'WAN Port (WAN > Wireless)'. The title bar includes 'Quick Start' and 'CERBERUS P6341'. The main content area is titled 'Select WAN Port' and contains the following fields:

Connect Mode	ADSL (Recommended)
Protocol	PPPoA (RFC2864, PPP over AAL5)
VPI / VCI	0 / 35
Username	Username
IP Address	Obtain an IP Address Automatically

At the bottom, there are two buttons: 'Continue' and 'Jump to Wireless setting'.

**Connect Mode** – Select method you want to use to connect to the Internet: **EWAN** or **ADSL**.

**Continue** – Continue to EWAN or ADSL configuration (based on option selected in Connect Mode list). If you want to configure ADSL connection, ADSL line must be connected to router before you can proceed.

**Jump to Wireless setting** – Skip EWAN/ADSL configuration and go directly to WLAN configuration.

### ADSL / Select Protocol

You will see this screen if you selected **ADSL** and clicked **Continue** on previous screen (**Select WAN Port**). This screen appearance changes with selected **Protocol**:

- **PPPoE (RFC2516, PPP over Ethernet)**

PPPoE (PPP over Ethernet) provides access control in a manner similar to dial-up services using PPP.

The screenshot shows the 'Quick Start' configuration window for 'Select protocol'. The title bar includes 'Quick Start' and 'CERBERUS P6341'. The main content area is titled 'Select protocol' and contains the following fields:

Protocol	PPPoE (RFC2516, PPP over Ethernet)
VPI / VCI	0 / 35
Username	Username
Password	*****
Service Name	
Encap. method	<input type="radio"/> VciMux <input checked="" type="radio"/> LLC
Auth. Protocol	Auto
IP Address	0.0.0.0 ('0.0.0.0' means 'Obtain an IP address automatically')

At the bottom, there is a 'Continue' button.

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 20 alphanumeric characters.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Continue** – Click this button to configure and establish connection.

- **PPPoA (RFC2684, PPP over AAL5)**

PPPoA stands for Point to Point Protocol over ATM Adaptation Layer 5 (AAL5). It provides access control and billing functionality in a manner similar to dial-up services using PPP.

Quick Start		CERBERUS P6341
WAN Port (WAN > Wireless)		
Select protocol		
Protocol	PPPoA (RFC2684, PPP over AAL5)	
VPI / VCI	0 / 35	
Username	Username	
Password	••••••••	
Encap. method	<input type="radio"/> VcMux <input checked="" type="radio"/> LLC	
Auth. Protocol	Auto	
IP Address	0.0.0.0 (0.0.0.0) means 'Obtain an IP address automatically'	
Continue		

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Auth. Protocol** – Default is **Chap**. Your ISP advises on using **Chap** or **Pap**.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Continue** – Click this button to configure and establish connection.

- **MPoA (RFC 1483/RFC2684, Multiprotocol Encapsulation over AAL5)**

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single IP account, sharing the single IP address. If users on your LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Encap. mode** – Choose whether you want the device to function as bridge mode or routing mode.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Netmask** – The default netmask is **255.255.255.0**. User can change it to other such as **255.255.255.128**. Type the netmask assigned to you by your ISP (if given)

**Gateway** – Enter the IP address of the default gateway.

**Continue** – Click this button to configure and establish connection.

- **Pure Bridge**

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Continue** – Click this button to configure and establish connection.

- **PPPoE with Pass-through**

**Quick Start** CERBERUS P6341

WAN Port (WAN > Wireless)

Select protocol

Protocol	PPPoE with Pass-through
VPI / VCI	0 / 35
Username	Username
Password	••••••
Service Name	
Encap. method	<input type="radio"/> VcMux <input checked="" type="radio"/> LLC
Auth. Protocol	Auto
IP Address	0.0.0.0 (0.0.0.0 means 'Obtain an IP address automatically')

Continue

**Protocol** – Change used protocol.

**VPI / VCI** – Enter the information provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 20 alphanumeric characters.

**Encap. method** – Select the encapsulation method provided by your ISP (**VcMux** or **LLC**).

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Continue** – Click this button to configure and establish connection.

## EWAN / Select Protocol

You will see this screen if you selected **EWAN** and clicked **Continue** on previous screen (**Select WAN Port**). This screen appearance changes with selected **Protocol**:

- **Obtain an IP Address Automatically**

If ISP assigns IP address, subnet mask, gateway address, and DNS server addresses via DHCP router can automatically obtain this information.

**Quick Start** CERBERUS P6341

WAN Port (WAN > Wireless)

Select protocol

Protocol	Obtain an IP Address Automatically
----------	------------------------------------

Continue

**Protocol** – Change used protocol.

**Continue** – Click this button to configure and establish connection.

- **Fixed IP Address**

Select this option to set static IP information. You will need to enter in the IP address, Netmask, and gateway address, provided to you by your ISP. Each IP address entered in the fields must be in the appropriate IP form, which is four IP octets separated by a dot (x.x.x.x).

The screenshot shows the 'Quick Start' configuration window for 'Fixed IP Address'. The window title is 'Quick Start' and 'CERBERUS P6341'. The main heading is 'WAN Port (WAN > Wireless)'. Below this is a 'Select protocol' section with a dropdown menu set to 'Fixed IP Address'. The form fields are: 'IP Address' (0.0.0.0), 'Netmask' (empty), and 'Gateway' (empty). A 'Continue' button is at the bottom.

**Protocol** – Change used protocol.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Netmask** – The default is 0.0.0.0. User can change it to other such as 255.255.255.0. Type the subnet mask assigned to you by your ISP (if given).

**Gateway** – You must specify a gateway IP address (supplied by your ISP).

**Continue** – Click this button to configure and establish connection.

- **PPPoE**

PPPoE (PPP over Ethernet) provides access control in a manner similar to dial-up services using PPP.

The screenshot shows the 'Quick Start' configuration window for 'PPPoE'. The window title is 'Quick Start' and 'CERBERUS P6341'. The main heading is 'WAN Port (WAN > Wireless)'. Below this is a 'Select protocol' section with a dropdown menu set to 'PPPoE'. The form fields are: 'Username' (empty), 'Password' (empty), 'Service Name' (empty), 'IP Address' (0.0.0.0 with a note '(0.0.0.0' means 'Obtain an IP address automatically)'), and 'Authentication Protocol' (Auto). A 'Continue' button is at the bottom.

**Protocol** – Change used protocol.

**Username** – Enter the username provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to **128** alphanumeric characters (case sensitive).

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 20 alphanumeric characters.


**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Authentication Protocol** – Default is Chap. Your ISP advises on using Chap or Pap.


**Continue** – Click this button to configure and establish connection.

## Please wait...

After entering correct information and clicking **Continue** button on **Select Protocol** screen, router will be configured and connection established.




If entered values was correct, following screen will appear:

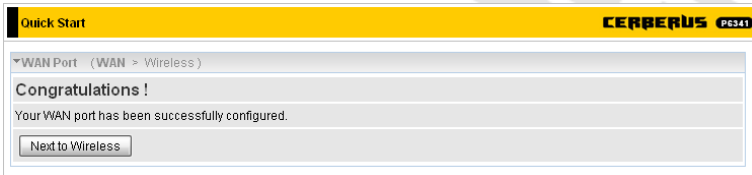

**Next to Wireless** – Continue to WLAN configuration.

## Wireless

### Set Wireless configuration

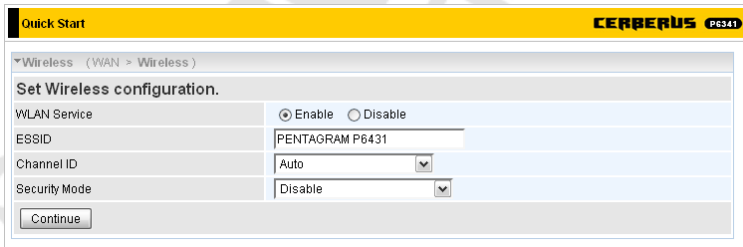

**WLAN Service** – **Enable** or **Disable** built-in Access Point.

**ESSID** – The ESSID is the unique name of a wireless access point (AP) to be distinguished from another. For security propose, change to a unique ID name to the AP which is already built-in to the router's wireless interface. It is case sensitive and must not excess 32 characters. Make sure your wireless clients have exactly the same ESSID as the device, in order to get connected to your network.

**Channel ID** – Select the ID channel that you would like to use.

**Security Mode** – You can disable or enable with WPA or WEP for protecting wireless network. It is recommended to enable wireless network protection (see [LAN / Wireless](#) section for details).

**Continue** – Save all settings and return to **Status** page.

## Configuration

### LAN

In this group you can find all settings for LAN network, both wired and wireless.

### LAN / Ethernet

The router supports more than one Ethernet IP addresses in the LAN, and with distinct LAN subnets through which you can access the Internet at the same time. Users usually only have one subnet in their LAN. The default IP address for the router is 192.168.1.100.

The screenshot shows the 'Configuration' window for the Cerberus P6341 router. The 'Ethernet' section is expanded, showing a 'Parameters' table with the following values:

Parameters	
IP Address	192.168.1.100
Netmask	255.255.255.0
RIP	Disable

At the bottom of the configuration window, there are two buttons: 'Apply' and 'Cancel'.

**IP Address** – The default IP on this router.

**Netmask** – The default subnet mask on this router.

**RIP** – RIP v1, RIP v2, RIP v1+v2 and RIP v2 Multicast.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

### LAN / IP Alias

This function allows the creation of multiple virtual IP interfaces on this router. It helps to connect two or more local networks to the ISP or remote node. In this case, an internal router is not required.

The screenshot shows the 'Configuration' window for the Cerberus P6341 router. The 'IP Alias' section is expanded, showing a 'Parameters' table with the following columns:

Parameters	
IP Address	Netmask
<input type="text"/>	<input type="text"/>

At the bottom of the configuration window, there are two buttons: 'Add' and 'Edit / Delete'.

**IP Address** – Specify an IP address on this virtual interface.

**Netmask** – Specify a subnet mask on this virtual interface.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

## LAN / Wireless

Configuration		CERBERUS P6341	
▼ Wireless			
<b>Parameters</b>			
WLAN Service	<input checked="" type="radio"/> Enable <input type="radio"/> Disable		
Mode	802.11g + n		
ESSID	PENTAGRAM P6341		
Hide ESSID	<input type="radio"/> Enable <input checked="" type="radio"/> Disable		
Regulation Domain	Europe		
Channel ID	Auto		
Channel Width	20/40MHz		
Tx PowerLevel	100 (0 ~ 100)		
AP MAC Address	00:04:ED:11:DE:D1		
AP Firmware Version	1.1.7.0		
WPS Service	<input type="radio"/> Enable <input checked="" type="radio"/> Disable		
WPS State	<input type="radio"/> Configured <input checked="" type="radio"/> Unconfigured		
WMM	<input type="radio"/> Enable <input checked="" type="radio"/> Disable		
<b>Wireless Distribution System (WDS)</b>			
WDS Service	<input type="radio"/> Enable <input checked="" type="radio"/> Disable		
Peer WDS MAC address	1: <input type="text"/>	2: <input type="text"/>	
	3: <input type="text"/>	4: <input type="text"/>	
**WDS depends on the settings of main security encryption type.**			
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>		Security settings ▾	

### Parameters

**WLAN Service** – Enable or Disable built-in Access Point.

**Mode** – The default setting is **802.11g + n** (Mixed mode). If you do not know or have both 11g and 11n devices in your network, then keep the default in mixed mode. From the drop-down list, you can select **802.11g** if you have only 11g card. If you have only 11b card, then select **802.11b**. If you have only 11n card, then select **802.11n**.

**ESSID** – The ESSID is the unique name of a wireless access point (AP) to be distinguished from another. For security propose, change to a unique ID name to the AP which is already built-in to the router's wireless interface. It is case sensitive and must not exceed 32 characters. Make sure your wireless clients have exactly the same ESSID as the device, in order to get connected to your network.

**Hide ESSID** – It is function in which transmits its ESSID to the air so that when wireless client searches for a network, router can then be discovered and recognized. Select **Enable** if you do not want broadcast your ESSID. When **Enable** is selected, no one will be able to locate the Access Point (AP) of your router. When **Disable** is selected, you can allow anybody with a wireless client to be able to locate the Access Point (AP) of your router.

**Regulation Domain** – There are seven Regulation Domains for you to choose from, including North America (N.America), Europe, France, etc. The Channel ID will be different based on this setting. Select region in which router will be used – broadcasting on channel unavailable for your region may be against the law.

**Channel ID** – Select the ID channel that you would like to use.

**Channel Width** – Select **20Mhz** or **20/40MHz**.

**Tx Power Level** – It is function that enhances the wireless transmitting signal strength. User may adjust this power level from minimum 0 up to maximum 100. Note: The Power Level maybe different in each access network user premises environment and choose the most suitable level for your network.

**AP MAC Address** – It is a unique hardware address of the Access Point.

**AP Firmware Version** – The Access Point firmware version.

**WPS service** – **Enable** or **Disable** WPS (Wireless Protected Setup).

**WPS State** – Current WPS state in AP. It is used for WCN (Windows Connect Now):

- **Configured** – This AP is configured via WPS. It is not allowed to configure via WCN.
- **Unconfigured** – This AP is un-configured via WPS. It can be configured via WCN.

**WMM** – **Enable** or **Disable** WMM (Wi-Fi Multimedia) also known as WME (Wireless Multimedia Extensions).

## Wireless Distribution System (WDS)

It is a wireless access point mode that enables wireless link and communication with other access point. It is easy to be installed, simply define the peer's MAC address of the connected AP. WDS takes advantages of cost saving and flexibility which no extra wireless client device is required to bridge between two access points and extending an existing wired or wireless infrastructure network to create a larger network.

**WDS Service** – The default setting is **Disable**. Check **Enable** radio button to activate this function.

**Peer WDS MAC Address** – It is the associated AP's MAC Address. It is important that your peer's AP must include your MAC address in order to acknowledge and communicate with each other. Note: For MAC Address, Semicolon ":" or Dash "-" must be included.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

**Security Settings** – Click on **Security Settings** to go to [LAN / Wireless Security](#).

## LAN / Wireless Security

The screenshot shows the 'Configuration' page for the Cerberus P6341. Under the 'Wireless Security' section, the 'Security Mode' is set to 'Disable'. There are 'Apply' and 'Cancel' buttons at the bottom of the configuration area.

Appearance of this page depends on option selected on **Security Mode** list:

- **Disable**

Wireless network in this mode is not protected and anyone who knows ESSID can connect to this wireless network.

This is a duplicate of the screenshot above, showing the 'Wireless Security' configuration with 'Security Mode' set to 'Disable'.

- **WPA Pre-Shared Key**

Only wireless stations with security set to WPA-PSK will be able to connect to this network.

Wireless Security	
Parameters	
Security Mode	WPA Pre-Shared Key
WPA Algorithms	TKIP
WPA Shared Key	
Group Key Renewal	3600 seconds
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

**Security Mode** – Change security mode.

**WPA Algorithms** – Select encryption algorithm: **TKIP** (Temporal Key Integrity Protocol) or **AES** (Advanced Encryption Standard). AES utilizes a stronger encryption method and incorporates Message Integrity Code (MIC) to provide protection against hackers.

**WPA Shared Key** – The key for network authentication. The input format is in character style and the key size should be in the range between 8 and 63 characters.

**Group Key Renewal** – The period of renewal time for changing the security key between wireless client and Access Point (AP). This process is done automatically.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

- **WPA2 Pre-Shared Key**

Only wireless stations with security set to WPA2-PSK will be able to connect to this network.

Wireless Security	
Parameters	
Security Mode	WPA2 Pre-Shared Key
WPA Algorithms	TKIP
WPA Shared Key	
Group Key Renewal	3600 seconds
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

**Security Mode** – Change security mode.

**WPA Algorithms** – Select encryption algorithm: **TKIP** (Temporal Key Integrity Protocol) or **AES** (Advanced Encryption Standard). AES utilizes a stronger encryption method and incorporates Message Integrity Code (MIC) to provide protection against hackers.

**WPA Shared Key** – The key for network authentication. The input format is in character style and the key size should be in the range between 8 and 63 characters.

**Group Key Renewal** – The period of renewal time for changing the security key between wireless client and Access Point (AP). This process is done automatically.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

● **WPA/WPA2 Pre-Shared Key**

Wireless stations with security set to both WPA-PSK or WPA2-PSK will be able to connect to this network.

Parameters	
Security Mode	WPA/WPA2 Pre-Shared Key
WPA Algorithms	TKIP
WPA Shared Key	
Group Key Renewal	3600 Seconds

Buttons: Apply, Cancel

**Security Mode** – Change security mode.

**WPA Algorithms** – Select encryption algorithm: **TKIP** (Temporal Key Integrity Protocol) or **AES** (Advanced Encryption Standard). AES utilizes a stronger encryption method and incorporates Message Integrity Code (MIC) to provide protection against hackers.

**WPA Shared Key** – The key for network authentication. The input format is in character style and the key size should be in the range between 8 and 63 characters.

**Group Key Renewal** – The period of renewal time for changing the security key between wireless client and Access Point (AP). This process is done automatically.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

● **WEP**

Parameters	
Security Mode	WEP
WEP Authentication	Open System
Default Used WEP Key	1 2 3 4
Passphrase (Generate Key)	Buttons: WEP64, WEP128
Key 1	Hex
Key 2	Hex
Key 3	Hex
Key 4	Hex

Buttons: Apply, Cancel

WEP 64 - Hex: 10 Hex codes, (1~9, a-f, A-F). EX: 11aa22cc33.  
 WEP 64 - ASCII: 5 ASCII characters are required. Insert your WEP key manually. EX: 1a3eb.  
 WEP 128 - Hex: 26 Hex codes, (1~9, a-f, A-F). EX: 11aa22cc33dd44ee55effe35f.  
 WEP 128 - ASCII: 13 ASCII characters are required. Insert your WEP key manually. EX: 1a3e?1dbd3ert.

**WEP Authentication** – To prevent unauthorized wireless stations from accessing data transmitted over the network, the router offers secure data encryption, known as WEP. If you require high security for transmissions, there are three options to select from:

- **Open System** – No authentication is required to connect to this network.
- **Share key** – Authentication is required and is based on Share keys.
- **Both** – Used authentication method depends on wireless station security settings.

**Default Used WEP Key** – Select the encryption key ID; please refer to Key (1~4) below.

**Passphrase** – This is used to generate WEP keys automatically based upon the input string and a pre-defined algorithm in WEP64 or WEP128. You can input the same string in both the AP and Client card settings to generate the same WEP keys. Please note that you do not have to enter Key (1-4) as below when the Passphrase is enabled.

**Key (1-4)** – Enter the key to encrypt wireless data. To allow encrypted data transmission, the WEP Encryption Key values on all wireless stations must be the same as the router.

There are four keys for your selection. The input format is in HEX or ASCII style, 5 and 13 ASCII codes or 10 and 26 HEX codes are required for WEP64 and WEP128 respectively no any separator is included.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## LAN / WPS

WPS feature is follow Wi-Fi Alliance WPS standard and it ease set up of security-enabled Wi-Fi networks in the home and small office environment. Reduces by half the user steps to configure a network and supports two methods that are familiar to most consumers to configure a network and enable security.

Parameters	
WPS Service	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Role	<input checked="" type="radio"/> Registrar <input type="radio"/> Enrollee
WPS PIN	11711537
Enrollee's PIN	<input type="text"/>

Start Cancel

**WPS Service – Enable or Disable** WPS function.

**Role** – Select router's AP role for WPS.

**WPS PIN** – Router's AP PIN required when configuring WPS with AP in Enrollee role.

**Enrollee's PIN** – Wireless station's PIN required when configuring WPS with AP in Registrar role.

**Start** – Click this button to begin connection using WPS.

**Cancel** – Click this button to cancel connection using WPS.

## LAN / DHCP Server

You can disable or enable the DHCP (Dynamic Host Configuration Protocol) server or enable the router's DHCP relay functions. The DHCP protocol allows your router to dynamically assign IP addresses to PCs on your network if they are configured to obtain IP addresses automatically. Appearance of this page depends on option selected on **DHCP Server Mode** list.

- **Disable**

When the DHCP Server is disabled, you will need to manually assign a fixed IP address to each PC on your network, and set the default gateway for each PC to the IP address of the router (the default is 192.168.1.100).

The screenshot shows the 'Configuration' page for the Cerberus P6341 router. Under the 'DHCP Server' section, the 'Parameters' table has 'DHCP Server Mode' set to 'Disable'. An 'Apply' button is visible below the table. At the bottom, it indicates 'Current Mode: DHCP Server'.

**Apply** – Click this button to apply changes made on this screen.

- **DHCP Server**

The screenshot shows the 'Configuration' page for the Cerberus P6341 router. Under the 'DHCP Server' section, the 'Parameters' table has 'DHCP Server Mode' set to 'DHCP Server'. Other fields include 'Domain Name' (home.gateway), 'Range Start' (192.168.1.101), 'Range End' (192.168.1.200), 'Default Lease Time' (43200 seconds), 'Maximum Lease Time' (86400 seconds), and 'Use Router as DNS Server' (checked). 'Primary DNS Server Address' and 'Secondary DNS Server Address' are empty. An 'Apply' button is visible below the table. At the bottom, it indicates 'Current Mode: DHCP Server'.

**Domain Name** – Domain in which router's DHCP server operates.

**Range Start** – First IP address in DHCP server's IP pool.

**Range End** – Last IP address in DHCP server's IP pool.

**Default Lease Time** – Default time for which DHCP client will lease IP address.

**Maximum Lease Time** – Maximum time for which DHCP client will lease IP address.

**Use Router as DNS Server** – Check this box if router will act also as DNS server.

**Primary / Secondary DNS Server** – IP addresses of primary and secondary DNS servers. This fields are unavailable when **Use Router as DNS Server** is enabled.

**Apply** – Click this button to apply changes made on this screen.

**Fixed Host** – Click on **Fixed Host** to open **Fixed Host** list.

### Fixed Host list

This list allows you to assign IP address to certain MAC address. This will allow your network printers or internal servers to receive always the same IP address while using DHCP server.

**Host Name** – Name of DHCP client.

**MAC Address** – MAC address to which IP address will be assigned.

**IP Address** – IP address which will be assigned to MAC address.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

**Return** – Click on **Return** to go back to main **DHCP Server** page.

- **DHCP Relay**

In DHCP Relay mode router's DHCP server relays all DHCP requests to external DHCP server. Use this function only if advised to do so by your network administrator or ISP.

**DHCP Relay Server** – IP address of external DHCP server.

**Apply** – Click this button to apply changes made on this screen.

## WAN

A WAN (Wide Area Network) is an outside connection to another network or the Internet.

### WAN / WAN Profile

This screen appearance changes with selected **Main Port** and **Protocol**:

**Main Port** – Select port which will be used to connect to the Internet: **ADSL** or **EWAN**. Besides using ADSL to get connected to the Internet, router offers its Ethernet port 1 as a WAN port to be used to connect to Cable Modems, VDSL, fiber optic lines and PON. This alternative, yet faster method to connect to the internet will provide users with more flexibility to get online

**Protocol** – Protocol used by ISP.

- **ADSL / PPPoE (RFC2516, PPP over Ethernet)**

PPPoE (PPP over Ethernet) provides access control in a manner similar to dial-up services using PPP.

Edit	Protocol	Interface	Description	VPI	VCI	Encap. method	NAT	IP	Delete
⊙	PPPoA	wan_main		0	35	LLC	Enable	0.0.0.0	

**Protocol** – Change used protocol.

**Description** – A user-definable name for this connection.

**VPI/VCI** – Enter the VPI and VCI information provided by your ISP.

**Encap. method** – Select the encapsulation format, the default is LLC. Select the one provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to 128 alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to 128 alphanumeric characters (case sensitive)

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 15 alphanumeric characters.

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single ISP account, sharing a single IP address. If users on your LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**Obtain DNS** – Select **Automatic** check box to receive DNS via DHCP.

**Primary / Secondary** – Enter the IP addresses of the DNS servers. The DNS servers are passed to the DHCP clients along with the IP address and the Netmask.

**Connection** – Check **Always On** box if you want the router to establish a PPPoE session when starting up and to automatically re-establish the PPPoE session when disconnected by the ISP. Uncheck **Always On** if you want to establish a PPPoE session only when there is a packet requesting access to the Internet (i.e. when a program on your computer attempts to access the Internet). In this mode, you must set **Idle Timeout** value at same time.

**Idle Timeout** – Auto-disconnect the broadband firewall gateway when there is no activity on the line for a predetermined period of time. The minimum value is 10 minutes.

**MTU** – Maximum Transmission Unit. The size of the largest datagram (excluding media-specific headers) an IP attempts to send through the interface.

**MAC Spoofing** – Select **Enable** and enter a MAC address that will temporarily change your router's MAC address to the one you have specified in this field. Leave it as **Disabled** if you do not wish to change the MAC address of your router.

**Apply / Edit / Delete** – Click this button to apply and save new values to list.

- **ADSL / PPPoA (RFC2684, PPP over AAL5)**

PPPoA stands for Point to Point Protocol over ATM Adaptation Layer 5 (AAL5). It provides access control and billing functionality in a manner similar to dial-up services using PPP.

The screenshot shows the 'Configuration' page for the Cerberus P6341 router, specifically the 'WAN Profile' section. The 'Parameters' tab is active, showing settings for a PPPoA connection. The 'Main Port' is set to 'ADSL'. The 'Protocol' is 'PPPoA (RFC2684, PPP over AAL5)'. The 'Description' field is empty. 'VPI / VCI' is set to '0 / 35'. 'Encap. method' is 'LLC'. 'Username' and 'Password' fields are present, with the password masked by dots. 'NAT' is checked and set to 'Enable' with an IP of '0.0.0.0: Auto'. 'Auth. Protocol' is 'Auto'. 'Obtain DNS' is checked and set to 'Automatic'. 'Connection' is checked and set to 'Always On'. 'Idle Timeout' is '0 min(s)'. 'MTU' is '1500'. At the bottom, there are 'Add', 'Apply / Edit / Delete', and 'Delete' buttons. A table below the form shows the active profile: PPPoA on the wan\_main interface.

Edit	Protocol	Interface	Description	VPI	VCI	Encap. method	NAT	IP	Delete
<input checked="" type="radio"/>	PPPoA	wan_main		0	35	LLC	Enable	0.0.0.0	

**Protocol** – Change used protocol.

**Description** – User-definable name for the connection.

**VPI/VCI** – Enter the VPI and VCI information provided by your ISP.

**Encap. method** – Select the encapsulation format, the default is LLC. Select the one provided by your ISP

**Username** – Enter the username provided by your ISP. You can input up to 128 alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to 128 alphanumeric characters (case sensitive).

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single IP account, sharing a single IP address. If users on your LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP

address from your ISP.

**Auth. Protocol** – Default is **Auto**. Your ISP should advise you on whether to use **Chap** or **Pap**.

**Obtain DNS** – Select **Automatic** check box to receive DNS via DHCP.

**Primary / Secondary** – Enter the IP addresses of the DNS servers. The DNS servers are passed to the DHCP clients along with the IP address and the Netmask.

**Connection** – Check **Always On** box if you want the router to establish a PPPoA session when starting up and to automatically re-establish the PPPoA session when disconnected by the ISP. Uncheck **Always On** if you want to establish a PPPoA session only when there is a packet requesting access to the Internet (i.e. when a program on your computer attempts to access the Internet). In this mode, you must set **Idle Timeout** value at same time.

**Idle Timeout** – Auto-disconnect the broadband firewall gateway when there is no activity on the line for a predetermined period of time. The minimum value is 10 minutes.

**MTU** – Maximum Transmission Unit. The size of the largest datagram (excluding media-specific headers) an IP attempts to send through the interface.

**Apply / Edit / Delete** – Click this button to apply and save new values to list.

- **ADSL / MPoA (RFC 1483/RFC2684, Multiprotocol Encapsulation over AAL5)**

The screenshot shows the 'Configuration' window for 'CERBERUS P6341'. The 'WAN Profile' section is expanded to show 'Parameters'. The 'Main Port' is set to 'ADSL'. The 'Protocol' is 'MPoA (RFC1483/RFC2684, Multiprotocol Encapsulation over AAL5)'. The 'Description' is empty, 'VPI/VCI' is '0 / 35', and 'Encap. method' is 'LLC'. 'Encap. mode' is 'Bridged', 'NAT' is 'Enable', and 'Keep Alive' is 'Enable'. The 'IP (0.0.0.0: Auto)' is '0.0.0.0', 'Netmask' is '255.255.255.0', and 'Gateway' is empty. 'Obtain DNS' is 'Automatic', 'Primary' and 'Secondary' are empty. 'MAC Spoofing' is 'Enable'. There are 'Add' and 'Apply / Edit / Delete' buttons. Below is a table of WAN profiles:

Edit	Protocol	Interface	Description	VPI	VCI	Encap. method	NAT	IP	Delete
⊙	PPPoA	wan_main		0	35	LLC	Enable	0.0.0.0	

**Protocol** – Change used protocol.

**Description** – Your description of this connection.

**VPI/VCI** – Enter the VPI and VCI information provided by your ISP.

**Encap. method** – Select the encapsulation format, the default is LLC. Select the one provided by your ISP.

**Encap. mode** – Choose whether you want the device to function as bridge mode or routing mode.

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single IP account, sharing the single IP address. If users on your LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Netmask** – The default is 255.255.255.0. User can change it to other such as 255.255.255.128. Type the netmask assigned to you by your ISP (if given).

**Gateway** – Enter the IP address of the default gateway.

**Obtain DNS** – Select **Automatic** check box to receive DNS via DHCP.

**Primary / Secondary** – Enter the IP addresses of the DNS servers. The DNS servers are passed to the DHCP clients along with the IP address and the Netmask.

**MAC Spoofing** – Select **Enable** and enter a MAC address that will temporarily change your router's MAC address to the one you have specified in this field. Leave it as **Disabled** if you do not wish to change the MAC address of your router.

**Apply / Edit / Delete** – Click this button to apply and save new values to list.

- **ADSL / Pure Bridge**

**Configuration** CERBERUS P6341

WAN Profile

Parameters

Main Port: ADSL (Current Main Port: ADSL)

Protocol: Pure Bridge

Description: [ ] VPI/VCI: 0 / 35 Encap. method: LLC

Add Apply/Edit/Delete

Edit	Protocol	Interface	Description	VPI	VCI	Encap. method	NAT	IP	Delete
<input checked="" type="radio"/>	PPPoA	wan_main		0	35	LLC	Enable	0.0.0.0	

**Protocol** – Change used protocol.

**Description** – A user-definable name for this connection.

**VPI/VCI** – Enter the VPI and VCI information provided by your ISP.

**Encap. method** – Select the encapsulation format, this is provided by your ISP.

**Add** – Click this button to add new item to the list.

**Apply / Edit / Delete** – Click this button to apply and save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

- **ADSL / PPPoE with Pass-through**

**Configuration** CERBERUS P6341

WAN Profile

Parameters

Main Port: ADSL (Current Main Port: ADSL)

Protocol: PPPoE with Pass-Through

Description: [ ] VPI/VCI: 0 / 35 Encap. method: LLC

Username: Username Password: [ ] Service Name: [ ]

NAT:  Enable IP (0.0.0.0: Auto) 0.0.0.0 Auth. Protocol: Auto

Obtain DNS:  Automatic Primary: [ ] Secondary: [ ]

Connection:  Always On Idle Timeout: 0 min(s) MTU: 1500

MAC Spoofing:  Enable [ ]

Add Apply/Edit/Delete

Edit	Protocol	Interface	Description	VPI	VCI	Encap. method	NAT	IP	Delete
<input checked="" type="radio"/>	PPPoA	wan_main		0	35	LLC	Enable	0.0.0.0	

**Protocol** – Change used protocol.

**Description** – A user-definable name for this connection.

**VPI/VCI** – Enter the VPI and VCI information provided by your ISP.

**Encap. method** – Select the encapsulation format, the default is LLC. Select the one provided by your ISP.

**Username** – Enter the username provided by your ISP. You can input up to 128 alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to 128 alphanumeric characters (case sensitive)

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 15 alphanumeric characters.

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single ISP account, sharing a single IP address. If users on your LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**Obtain DNS** – Select **Automatic** check box to receive DNS via DHCP.

**Primary / Secondary** – Enter the IP addresses of the DNS servers. The DNS servers are passed to the DHCP clients along with the IP address and the Netmask.

**Connection** – Check **Always On** box if you want the router to establish a PPPoE session when starting up and to automatically re-establish the PPPoE session when disconnected by the ISP. Uncheck **Always On** if you want to establish a PPPoE session only when there is a packet requesting access to the Internet (i.e. when a program on your computer attempts to access the Internet). In this mode, you must set **Idle Timeout** value at same time.

**Idle Timeout** – Auto-disconnect the broadband firewall gateway when there is no activity on the line for a predetermined period of time. The minimum value is 10 minutes.

**MTU** – Maximum Transmission Unit. The size of the largest datagram (excluding media-specific headers) an IP attempts to send through the interface.

**MAC Spoofing** – Select **Enable** and enter a MAC address that will temporarily change your router's MAC address to the one you have specified in this field. Leave it as **Disabled** if you do not wish to change the MAC address of your router.

**Apply / Edit / Delete** – Click this button to apply and save new values to list.

- **EWAN / Obtain an IP Address Automatically**

If ISP assigns IP address, subnet mask, gateway address, and DNS server addresses via DHCP, router can automatically obtain this information.

The screenshot shows the 'Configuration' page for the Cerberus P6341 router. The 'WAN Profile' section is expanded, showing the following parameters:

Parameters	
Main Port	EWAN (Current Main Port: ADSL)
Line Speed	30000 Kbps / 30000 Kbps (Downstream / Upstream)
Protocol	Obtain an IP Address Automatically
NAT	<input checked="" type="checkbox"/> Enable
Obtain DNS	<input checked="" type="checkbox"/> Automatic Primary <input type="text"/> Secondary <input type="text"/>
MAC Spoofing	<input type="checkbox"/> Enable <input type="text"/>

At the bottom of the form are 'Apply' and 'Cancel' buttons.

**Line Speed** – Set the downstream and upstream of your connection in kilobytes per second. The connection speed is used by QoS settings.

**Protocol** – Change used protocol.

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single ISP account, sharing a single IP address. If users on your

LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**Obtain DNS** – Select **Automatic** check box to receive DNS via DHCP.

**Primary / Secondary** – Enter the IP addresses of the DNS servers. The DNS servers are passed to the DHCP clients along with the IP address and the Netmask.

**MAC Spoofing** – Select **Enable** and enter a MAC address that will temporarily change your router's MAC address to the one you have specified in this field. Leave it as **Disabled** if you do not wish to change the MAC address of your router.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

- **EWAN / Fixed IP Address**

Select this option to set static IP information. You will need to enter in the IP address, Netmask, and gateway address, provided to you by your ISP. Each IP address entered in the fields must be in the appropriate IP form, which is four IP octets separated by a dot (x.x.x.x).

The screenshot shows the 'Configuration' page for the Cerberus P6341 router. The 'WAN Profile' section is expanded to show 'Parameters'. The 'Main Port' is set to 'EWAN'. 'Line Speed' is set to '30000 Kbps / 30000 Kbps'. The 'Protocol' is set to 'Fixed IP Address'. 'NAT' is checked and set to 'Enable'. There are input fields for 'IP Address', 'Netmask', and 'Gateway'. Under 'Obtain DNS', the 'Automatic' checkbox is checked, and there are fields for 'Primary' and 'Secondary' DNS servers. 'MAC Spoofing' is unchecked. At the bottom of the form are 'Apply' and 'Cancel' buttons.

**Line Speed** – Set the downstream and upstream of your connection in kilobytes per second. The connection speed is used by QoS settings.

**Protocol** – Change used protocol.

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single ISP account, sharing a single IP address. If users on your LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Netmask** – The default is 0.0.0.0. User can change it to other such as 255.255.255.0. Type the subnet mask assigned to you by your ISP (if given).

**Gateway** – You must specify a gateway IP address (supplied by your ISP).

**Obtain DNS** – Select **Automatic** check box to receive DNS via DHCP.

**Primary / Secondary** – Enter the IP addresses of the DNS servers. The DNS servers are passed to the DHCP clients along with the IP address and the Netmask.

**MAC Spoofing** – Select **Enable** and enter a MAC address that will temporarily change your router's MAC address to the one you have specified in this field. Leave it as **Disabled** if you do not wish to change the MAC address of your router.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

- **EWAN / PPPoE**

PPPoE (PPP over Ethernet) provides access control in a manner similar to dial-up services using PPP.

The screenshot shows the 'Configuration' window for the Cerberus P6341 router. The 'WAN Profile' section is expanded to show 'Parameters'. The settings are as follows:

Parameters	
Main Port	EWAN ( Current Main Port : ADSL)
Line Speed	30000 Kbps / 30000 Kbps (Downstream / Upstream)
Protocol	PPPoE
Username	_____
Password	_____
Service Name	_____
NAT	<input checked="" type="checkbox"/> Enable IP (0.0.0.0: Auto) _____ Auth. Protocol Auto
Obtain DNS	<input checked="" type="checkbox"/> Automatic Primary _____ Secondary _____
Connection	<input checked="" type="checkbox"/> Always On Idle Timeout 0 min(s) MTU 1492
MAC Spoofing	<input type="checkbox"/> Enable _____

Buttons: [Apply] [Cancel]

**Line Speed** – Set the downstream and upstream of your connection in kilobytes per second. The connection speed is used by QoS settings.

**Protocol** – Change used protocol.

**Username** – Enter the username provided by your ISP. You can input up to 128 alphanumeric characters (case sensitive). This is in the format of *username@ispname* instead of simply *username*.

**Password** – Enter the password provided by your ISP. You can input up to 128 alphanumeric characters (case sensitive)

**Service Name** – This item is for identification purposes. If it is required, your ISP provides you the information. Maximum input is 15 alphanumeric characters.

**NAT** – The NAT (Network Address Translation) feature allows multiple users to access the Internet through a single ISP account, sharing a single IP address. If users on your LAN have public IP addresses and can access the Internet directly, the NAT function can be disabled.

**IP Address** – Your WAN IP address. Leave this at 0.0.0.0 to automatically obtain an IP address from your ISP.

**Auth. Protocol** – Default is **Auto**. Your ISP advises on using **Chap** or **Pap**.

**Obtain DNS** – Select **Automatic** check box to receive DNS via DHCP.

**Primary / Secondary** – Enter the IP addresses of the DNS servers. The DNS servers are passed to the DHCP clients along with the IP address and the Netmask.

**Connection** – Check **Always On** box if you want the router to establish a PPPoE session when starting up and to automatically re-establish the PPPoE session when disconnected by the ISP. Uncheck **Always On** if you want to establish a PPPoE session only when there is a packet requesting access to the Internet (i.e. when a program on your computer attempts to access the Internet). In this mode, you must set **Idle Timeout** value at same time.

**Idle Timeout** – Auto-disconnect the broadband firewall gateway when there is no activity on the line for a predetermined period of time. The minimum value is 10 minutes.


**MTU** – Maximum Transmission Unit. The size of the largest datagram (excluding media-specific headers) an IP attempts to send through the interface.

**MAC Spoofing** – Select **Enable** and enter a MAC address that will temporarily change your router's MAC address to the one you have specified in this field. Leave it as **Disabled** if you do not wish to change the MAC address of your router.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## WAN / ADSL Mode

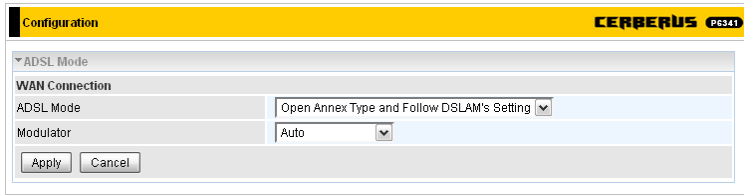

The screenshot shows a configuration window titled "Configuration" for the "CERBERUS P6341" device. The window is divided into sections. The top section is "WAN Connection". Under this section, there are two dropdown menus. The first is labeled "ADSL Mode" and is set to "Open Annex Type and Follow DSLAM's Setting". The second is labeled "Modulator" and is set to "Auto". At the bottom of the configuration area, there are two buttons: "Apply" and "Cancel".

**ADSL Mode** – There are five modes **Open Annex Type and Follow DSLAM's Setting**, **Annex A**, **Annex L**, **Annex M** and **Annex J** that user can select for this connection.

**Modulator** – There are seven modes **AUTO**, **ADSL multimode**, **ADSL2**, **ADSL2+**, **G.Lite**, **T1.413** and **G.DMT** that user can select for this connection.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## System

### System / Time Zone

The screenshot shows the 'Configuration' page for the Cerberus P6341 router, specifically the 'Time Zone' section. The 'Parameters' table is as follows:

Parameters	
Time Zone	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Local Time Zone (+/-GMT Time)	(GMT+01:00) Sarajevo, Skopje, Sofija, Warsaw, Zagreb
SNTP Server IP Address	192.43.244.18
	128.138.140.44
Daylight Saving	<input checked="" type="checkbox"/> Automatic
	<input type="checkbox"/> Manual
Resync Period	1440 minutes

At the bottom of the form are 'Apply' and 'Cancel' buttons.

The router does not have a real time clock on board; instead, it uses the Simple Network Time Protocol (SNTP) to get the current time from an SNTP server outside your network. Choose your local time zone, click **Enable** and click the **Apply** button. After a successful connection to the Internet, the router retrieves the correct local time from the SNTP server you have specified. If you prefer to specify an SNTP server other than those in the drop-down list, simply enter its IP address as shown above. Your ISP may provide an SNTP server for you to use.

**Resync Period** (in minutes) is the periodic interval the router waits before it resynchronizes the router's time with that of the specified SNTP server. To avoid unnecessarily increasing the load on your specified SNTP server you should keep the poll interval as high as possible – at the absolute minimum every few hours or even days.

### System / Firmware Upgrade

Your router's *firmware* is the software that allows it to operate and provides all its functionality. Think of your router as a dedicated computer, and the firmware as the software it runs. Over time this software may be improved and modified. Your router allows you to upgrade the software it runs to take advantage of these changes.

Clicking on **Browse** allows you to select the new firmware image file you have downloaded to your PC. Once the correct file is selected, click Upgrade to update the firmware in your router.

The screenshot shows the 'Configuration' page for the Cerberus P6341 router, specifically the 'Firmware Upgrade' section. The text reads: 'You may upgrade the system software on your network device. After upgrading, let your device restart with factory default settings or current settings.'

The 'Restart device with' section has two radio buttons:  Factory Default Settings and  Current Settings.

The 'New Firmware Image' field is empty, with a 'Browse...' button to its right. At the bottom are 'Upgrade' and 'Cancel' buttons.

**Restart Router with** – To choose **Factory Default Setting** or **Current Settings** that user want.

**New Firmware Image** – Type in the location of the file you wish to upload in this field or click **Browse...** to find it.

**Browse...** – Click **Browse...** to find the .afw file you wish to upload. Remember that you must decompress compressed (.zip) files before you can upload them.

**Upgrade** – Click upgrade to begin the upload process. This process may take up to two minutes.

**Warning: DO NOT power down the router or interrupt the firmware upgrade while it is still in process. Improper operation may damage the router.**

## System / Backup/Restore

The screenshot shows the 'Configuration' page for the Cerberus P6341 router. The 'Backup/Restore' section is expanded, showing options to backup or restore configuration settings. The 'Backup Configuration' section has a 'Backup' button. The 'Restore Configuration' section has a 'Configuration File' input field and a 'Browse...' button. Below this, there is a warning: 'Restore will overwrite the current configuration and restart the device. If you want to keep the current configuration, please use "Backup" first to save current configuration.' A 'Restore' button is located at the bottom of the section.

These functions allow you to save and backup your router's current settings to a file on your PC, or to restore a previously saved backup. This is useful if you wish to experiment with different settings, knowing that you have a backup handy in the case of any mistakes. It is advisable to backup your router's settings before making any significant changes to your router's configuration.

Press **Backup** to select where on your local PC to save the settings file. You may also change the name of the file when saving if you wish to keep multiple backups.

Press **Browse** to select a file from your PC to restore. You should only restore settings files that have been generated by the Backup function, and that were created when using the **current version** of the router's firmware. **Settings files saved to your PC should not be manually edited in any way.**

Select the settings files you wish to use, and press **Restore** to load those settings into the router.

## System / Restart Router

Click Restart with option Current Settings to reboot your router and restore your last saved configuration.


The screenshot shows the 'Configuration' page for the Cerberus P6341 router. The 'Restart' section is expanded, showing a warning: 'After restarting, Please wait for several seconds to let the system come up.' Below this, there are two radio button options: 'Factory Default Settings' and 'Current Settings'. The 'Current Settings' option is selected. A 'Restart' button is located at the bottom of the section.

If you wish to restart the router using the factory default settings (for example, after a firmware upgrade or if you have saved an incorrect configuration), select **Factory Default Settings** to reset to factory default settings.

You may also reset your router to factory settings by pressing in the small Reset pinhole button on the back of your router for about 6 seconds while the router is turned on.

## System / User Management

In order to prevent unauthorized access to your router's configuration interface, it requires all users to login with a password. You can set up multiple user accounts, each with their own password. Once you have clicked **Edit** on the account you want to edit, the information of the account will be displayed above.

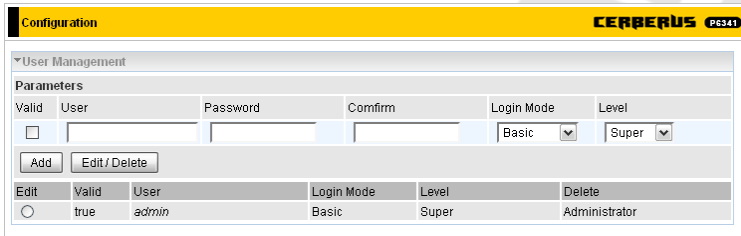

Valid	User	Password	Confirm	Login Mode	Level
<input type="checkbox"/>				Basic	Super

Edit	Valid	User	Login Mode	Level	Delete
<input type="radio"/>	true	admin	Basic	Super	Administrator

**Valid** – Select this box to enable or deselect to disable user account..

**User** – Enter user name.

**Password / Confirm** – In both fields enter password for this user.

**Login Mode** – Configuration mode after user logon. **Advanced** mode is available only for users with **Super** privileges.


**Level** – Privileges level for this user.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

## System / Mail Alert

Send a log via email, if WAN IP is changed or if intruders accessing your computer without permission

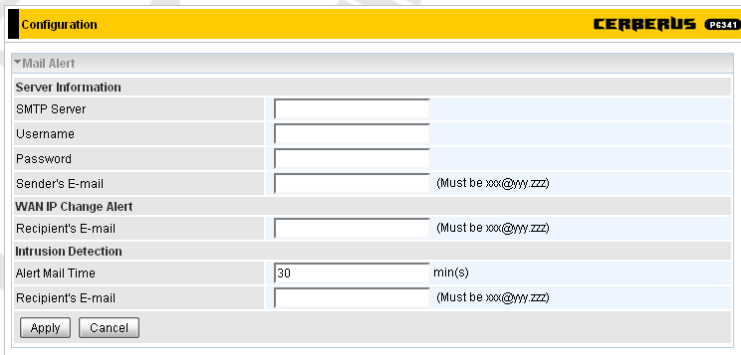

Server Information	
SMTP Server	
Username	
Password	
Sender's E-mail	(Must be xxx@yyy.zzz)

WAN IP Change Alert	
Recipient's E-mail	(Must be xxx@yyy.zzz)

Intrusion Detection	
Alert Mail Time	30 min(s)
Recipient's E-mail	(Must be xxx@yyy.zzz)

## Firewall

### Firewall / Packet Filter

Packet filtering enables you to configure your router to block specified internal/external users (**IP address**) from Internet access, or you can disable specific service requests (**Port number**) to /from Internet. This configuration program allows you to set up to 6 different filter rules for different users based on their IP addresses or their network Port number. The relationship among all filters is “**or**” operation, which means that the router checks these different filter rules one by one, starting from the first rule. As long as one of the rules is satisfied, the specified action is taken.

The screenshot shows the 'Configuration' window for 'CERBERUS P6341'. The 'Packet Filter' section is expanded, showing a form for creating a new rule. The form includes fields for Rule Name, Internal IP Address, External IP Address, Protocol (set to TCP), Action (set to forward), Internal Port, External Port, Direction (set to outgoing), Time Schedule (set to Always On), and a Log checkbox. Below the form are buttons for 'Add', 'Edit / Delete', and 'Reorder'. A table below the form lists the current filter rules.

Edit	Order	Rule Name	Internal IP Address External IP Address	Protocol	Internal Port External Port	Direction	Action	Time Schedule	Delete
		Default	Any Any	Any	Any Any	outgoing	forward	Always On	

**Rule Name** – Users-define description to identify this entry. The maximum name length is 32 characters, and then can choose application that they want from listbox.

**Internal IP Address / External IP Address** – This is the Address-Filter used to allow or block traffic to/from particular IP address(es). Input the range you want to filter out. If you leave empty or 0.0.0.0, it means any IP address.

**Protocol** – Specify the packet type (**TCP**, **UDP**, **ICMP**, etc.) that the rule applies to. Select **TCP** if you wish to search for the connection-based application service on the remote server using the port number. Or select **UDP** if you want to search for the connectionless application service on the remote server using the port number.

**Action** – If a packet matches this filter rule, **Forward** (allows the packets to pass) or **Drop** (disallow the packets to pass) this packet.

**Internal Port** – This Port or Port Range defines the ports allowed to be used by the Remote/WAN to connect to the application. Default is set from range 0 ~ 65535. It is recommended that this option be configured by an advanced user.

**External Port** – This is the Port or Port Range that defines the application.

**Direction** – Determine whether the rule is for outgoing packets or for incoming packets.

**Time Schedule** – It is self-defined time period. You may specify a time schedule for your prioritization policy. For setup and detail, refer to **Time Schedule** section.

**Log** – Check this box if you wish to generate logs when the filter rule is applied to a packet.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.


**Reorder** – Use arrows in **Order** column to change order of rules and then click **Reorder** button to apply new order.

**Attention:** If the DHCP server option is enabled, you must be very careful in assigning IP addresses of a filtered private IP range to avoid conflicts because you do not know which PC in the LAN is assigned which IP address. The easiest and safest way is that the filtered IP address is assigned to a specific PC that is not allowed to access an outside resource such as the Internet. You configure the filtered IP address manually for this PC, but it stays in the same subnet with the router.

## Firewall / MAC Filter

A MAC (Media Access Control) address is the unique network hardware identifier for each PC on your network's interface (i.e. its Network Interface Card or Ethernet card). Using your router's MAC Address Filter function, you can configure to block specific machines from accessing your LAN.

There are no pre-defined MAC address filter rules; you can add the filter rules to meet your requirements.

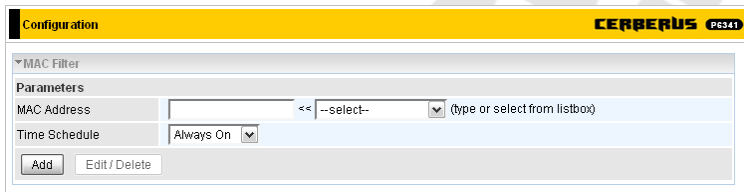

Configuration	
<b>CERBERUS P6341</b>	
MAC Filter	
Parameters	
MAC Address	<< --select-- (type or select from listbox)
Time Schedule	Always On
<input type="button" value="Add"/> <input type="button" value="Edit / Delete"/>	

**MAC Address** – Enter the MAC address you wish to manage.

**Time Schedule** – It is self-defined time period. You may specify a time schedule for your prioritization policy. For setup and detail, refer to [Time Schedule](#) section.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

## Firewall / Intrusion Detection

Check **Enable** if you wish to detect intruders accessing your computer without permission. The router automatically detects and blocks a DoS (Denial of Service) attack if a user enables this function. This kind of attack is not to access confidential data on the network; instead, it aims to disrupt specific equipment or the entire network. If this happens, users are not able to access network resources.

Parameters	
Intrusion Detection	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Maximum TCP Open Handshaking Count	100 per second
Maximum Ping Count	15 per second
Maximum ICMP Count	100 per second
Log	<input type="checkbox"/>

**Intrusion Detection** – Check **Enable** if you wish to detect intruders accessing your computer without permission.

**Maximum TCP Open Handshaking Count** – This is a threshold value to decide whether a SYN Flood attempt is occurring or not. Default value is 100 TCP SYN per seconds.

**Maximum Ping Count** – This is a threshold value to decide whether an ICMP Echo Storm is occurring or not. Default value is 15 ICMP Echo Requests (PING) per second.

**Maximum ICMP Count** – This is a threshold to decide whether an ICMP flood is occurring or not. Default value is 100 ICMP packets per seconds except ICMP Echo Requests (PING).

**Log** – Check **Log** if you wish to generate logs when the filter rule is applied to the Intrusion Detection.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## Firewall / Block WAN PING

Parameters	
Block WAN PING	<input type="radio"/> Enable <input checked="" type="radio"/> Disable

**Block WAN PING** – Check **Enable** if you wish to exclude outside PING requests from reaching this router.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## Firewall / URL Filter

URL (Uniform Resource Locator – e.g. an address in the form of <http://www.pentagram.eu> or <http://www.example.com>) filter rules allow you to prevent users on your network from accessing particular websites from their URL. There are no pre-defined URL filter rules; you can add filter rules to meet your requirements.

**Keywords Filtering** – Allows blocking by specific keywords within a particular URL rather than having to specify a complete URL (e.g. to block any image called "advertisement.gif"). When enabled, your specified keywords list is checked to see if any keywords are present in URLs accessed to determine if the connection attempt should be blocked. Note that the URL filter blocks web browser (HTTP) connection attempts using port 80 only. Click on **Detail** to open [Keywords Filtering](#) list.

**Domains Filtering** – Checks the domain name in URLs accessed against your list of domains to block or allow. If it matches, the URL request is sent (*Trusted*) or dropped (*Forbidden*). Please be note that the completed URL *www.[domain name]* shall be specified. Click on **Detail** to open [Domain Filtering](#) list.

**Restrict URL Features** – This function enhances the restriction to your URL rules. You can select to **Block Java Applet** (Blocks Web content which includes the Java Applet to prevent someone who wants to damage your system via the standard HTTP protocol), **Block ActiveX**, **Block Cookies** or **Block Proxy**.

**Except IP Address** – Click on **Detail** to open [Except IP Address](#) list.

**Time Schedule** – It is self-defined time period. You may specify a time schedule for your prioritization policy. For setup and detail, refer to [Time Schedule](#) section.

**Log** – Click **Log** if you wish to generate logs when the filter rule is applied to the URL Filter.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

- **Keywords Filtering**

**Keyword** – Enter keyword which will be blocked.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

**Return** – Click on **Return** to go back to [Firewall / URL Filter](#) page.

- **Domain Filtering**

**Domain** – Enter domain for which filter will be created.

**Type** – Select whether entered domain is **Trusted Domain** or **Forbidden Domain**.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

**Return** – Click on **Return** to go back to [Firewall / URL Filter](#) page.

- **Except IP Address**

**Internal IP Address** – Type IP address of range of IP addresses for which URL filtering won't be applied.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

**Return** – Click on **Return** to go back to [Firewall / URL Filter](#) page.

## QoS

### Quality of Service Introduction

If you've ever found your 'net' speed has slowed to a crawl because another family member is using a P2P file sharing program, you'll understand why the Quality of Service features in the routers is such a breakthrough for home users and office users.

### QoS: Keeping Your Net Connection Fast and Responsive

Configurable by internal IP address, external IP address, protocol, and port, the Quality of Service (QoS) gives you full control over which types of outgoing data traffic should be given priority by the router, ensuring bandwidth-consumption data like gaming packets, latency-sensitive application like voice, or even mission critical files, move through the router at lightning speed, even under heavy load. You can throttle the speed at which different types of outgoing data pass through the router. In addition, you can simply change the priority of different types of upload data and let the router sort out the actual speeds.

The screenshot shows the QoS configuration interface for the Cerberus P6341 router. At the top, there's a yellow header with 'Configuration' and 'CERBERUS P6341'. Below that, a dropdown menu is set to 'QoS'. The main configuration area has a title 'Non-Assigned Bandwidth Ratio => Upstream (LAN to WAN) : 100% Downstream (WAN to LAN) : 100%'. Under 'Parameters', there are several rows of settings: 'Application' (empty), 'Protocol' (Any), 'Rate Type' (Guaranteed (Minimum) Ratio), 'Internal IP Address' (two empty fields), 'External IP Address' (two empty fields), 'Time Schedule' (Always On), 'Direction' (LAN to WAN), 'DSCP Marking' (Disable), and 'Priority' (Normal). At the bottom, there are 'Add' and 'Edit / Delete' buttons.

**Non-Assigned Bandwidth Ratio** – Total available (Non-assigned) bandwidth, in percentage, that can be assigned for QoS purposes.

**Application** – A name that identifies an existing policy.

**Direction** – The traffic flow direction to be controlled by the QoS policy. There are two settings to be provided in the Router:

- **LAN to WAN** – You want to control the traffic flow from the local network to the outside world. e.g., you have a FTP server inside the local network and you want to have a limited traffic rate controlled by the QoS policy. So, you need to add a policy with **LAN to WAN** direction setting.
- **WAN to LAN** – Control Traffic flow from the WAN to LAN. The connection may be either issued from **LAN to WAN** or **WAN to LAN**.

**Protocol** – The Protocol will be controlled. For GRE protocol, there is no need to specify the IP addresses or Application ports in this page. For other protocols, at least one value shall be given.

- **ANY** – No protocol type is specified.
- **TCP**
- **UDP**
- **ICMP**
- **GRE** – For PPTP VPN Connections.

**DSCP Marking** – Differentiated Services Code Point (DSCP), it is the first 6 bits in the ToS byte. DSCP Marking allows users to classify traffic based on DSCP value and send packets to next Router.

**Note:** Make sure that the router(s) in the backbones network have the capability in executing and checking the DSCP through-out the QoS network.

DSCP Mapping Table	
Disabled	None
Best Effort	Best Effort (000000)
Premium	Express Forwarding (101110)
Gold service (L)	Class 1, Gold (001010)
Gold service (M)	Class 1, Silver (001100)
Gold service (H)	Class 1, Bronze (001110)
Silver service (L)	Class 2, Gold (010010)
Silver service (M)	Class 2, Silver (010100)
Silver service (H)	Class 2, Bronze (010110)
Bronze service (L)	Class 3, Gold (011010)
Bronze service (M)	Class 3, Silver (011100)
Bronze service (H)	Class 3, Bronze (011110)

**Rate Type** – 2 types are provided:

- **Limited (Maximum)** – Specify a limited data rate for this policy. It also is the maximal rate for this policy. For example, you may want to “throttle” the outgoing FTP speed to 20% of 256K and limit to it, you may use this type.
- **Guaranteed (Minimum)** – Specify a minimal data rate for this policy. For example, you want to provide a guaranteed data rate for your outside customers to access your internal FTP server with, say at least, 20% of your total bandwidth. You can use this type. Then, if there is available bandwidth that is not used, it will be given to this policy by following priority assignment.

**Ratio** – Assign the data ratio for this policy to be controlled. For example, we want to only allow 20% of the total data transfer rate for the LAN-to-WAN direction to be used for FTP server. Then we can specify here with data ratio = 20. If you have ADSL LINE with 256K/bps.rate, the estimated data rate, in kbps, for this rule is  $20\% * 256 * 0.9 = 46$  kbps. (For 0.9 is an estimated factor for the effective data transfer rate for a ADSL LINE from LAN to WAN. For WAN-to-LAN, it is 0.85 to 0.8).

**Priority** – Specify the priority for the bandwidth that is not used. For example, you may specify two different QoS policies for different applications. Both applications need a minimal bandwidth and need more bandwidth, beside the assigned one, if there is any available/non-used one available. So, you may specify which application can have higher priority to acquire the non-used bandwidth. For the sample priority assignment for different policies, it is served in a First-In-First-Out way.

**Internal IP Address** – The IP address values for Local LAN machines you want to control. (For IP packets from LAN to WAN, it is the source IP address. For IP packages from WAN to LAN, it is the destination IP address.)

**Internal Port** – The Application port values for local LAN machines you want to control. (For TCP/UDP packets from LAN to WAN, it is the source port value. For TCP/UDP packets from WAN to LAN, it is the destination port value.)

**External IP Address** – The IP address values for Remote WAN machines you want to control. (For IP packets from LAN to WAN, it is the destination IP address. For IP packages from WAN to LAN, it is the source IP address.)

**External Ports** – The Application port values for remote machines you want to control. (For TCP/UDP packets from LAN to WAN, it is the destination port value. For TCP/UDP packets from WAN to LAN, it is the source port value.)

**Time Schedule** – Scheduling your prioritization policy.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

**Example QoS Plan**

Application	IP or Ports	Control Flow	Data Rate	Time Schedule
VoIP User	192.168.1.1	Outgoing	Minimal 20% with high priority for non-used bandwidth with SDCP marking Class 1 Gold Service	Always
FTP Sever	192.168.1.100	Incoming and Outgoing	Outgoing: minimal 30%. Data rate. Incoming: minimal 30%. Data rate. Both with low priority for non-used bandwidth.	Only Working Hours 9:00 to 17:00 Monday to Friday.
HTTP web browsing users	80	Incoming and Outgoing	Outgoing : limited 20%. Data rate. Incoming: limited 30%. Data rate.	Always

**ADSL Subscription Rate**

Upstream: 256 kbps

Downstream: 2048 Mbps

**Example QoS Setup**

**Configuration CERBERUS P6341**

▼ OoS

Non-Assigned Bandwidth Ratio => Upstream (LAN to WAN) : 30% Downstream (WAN to LAN) : 40%

Parameters

Application: [ ] Direction: LAN to WAN [v]  
 Protocol: Any [v] DSCP Marking: Disable [v]  
 Rate Type: Guaranteed (Minimum) [v] Ratio: [ ] % Priority: Normal [v]  
 Internal IP Address: [ ] ~ [ ] Internal Port: [ ] ~ [ ]  
 External IP Address: [ ] ~ [ ] External Port: [ ] ~ [ ]  
 Time Schedule: Always On [v]

[ Add ] [ Edit / Delete ]

Edit	Application	Direction	Rate Type	Ratio	Time Schedule	Delete
<input type="radio"/>	VOIP	LAN to WAN	Guaranteed	20%	Always On	<input type="checkbox"/>
<input type="radio"/>	FTP Server	LAN to WAN	Guaranteed	30%	TimeSlot1	<input type="checkbox"/>
<input type="radio"/>	FTP Server IN	WAN to LAN	Guaranteed	30%	TimeSlot1	<input type="checkbox"/>
<input type="radio"/>	HTTP Browsing OUT	LAN to WAN	Limited	20%	Always On	<input type="checkbox"/>
<input type="radio"/>	HTTP Browsing IN	WAN to LAN	Limited	30%	Always On	<input type="checkbox"/>

**VoIP application**

Voice is latency-sensitive application. Most VoIP devices are used SIP protocol and the port number will be assigned by SIP module automatically. Better to use fixed IP address for catching VoIP packets as high priority.

## **Virtual Server**

In TCP/IP and UDP networks a port is a 16-bit number used to identify which application program (usually a server) incoming connections should be delivered to. Some ports have numbers that are pre-assigned to them by the IANA (the Internet Assigned Numbers Authority), and these are referred to as "well-known ports". Servers follow the well-known port assignments so clients can locate them.

If you wish to run a server on your network that can be accessed from the WAN (i.e. from other machines on the Internet that are outside your local network), or any application that can accept incoming connections (e.g. Peer-to-peer/P2P software such as instant messaging applications and P2P file-sharing applications) and are using NAT (Network Address Translation), then you need to configure your router to forward these incoming connection attempts using specific ports to the PC on your network running the application. You also need to use port forwarding if you wish to host an online game server.

The reason is that when using NAT, your publicly accessible IP address is used by and points to your router, which needs to deliver all traffic to the private IP addresses used by your PCs. Please see the **WAN** configuration section of this manual for information on NAT.

The Internet Assigned Numbers Authority (IANA) is the central coordinator for the assignment of unique parameter values for Internet protocols. Port numbers range from 0 to 65535, but only port numbers 0 to 1023 are reserved for privileged services and are designated as "well-known ports". The registered ports are numbered from 1024 through 49151. The remaining ports, referred to as dynamic ports, or private ports, are numbered from 49152 through 65535. Examples of well-known and registered port numbers are shown below, for further information, please see IANA's website at: <http://www.iana.org/assignments/port-numbers>

**Note: Using port forwarding does have security implications, since outside users are able to connect to PCs on your network. For this reason you are advised to use specific Virtual Server entries just for the ports your application requires instead of simply using DMZ or creating a Virtual Server entry for "All" protocols, as doing so results in all connection attempts to your public IP address accessing the specified PC.**

**Attention: If you disable the NAT option in the WAN / WAN Profile section, the Virtual Server function becomes invalid.**

**Attention: If the DHCP server option is enabled, you have to be very careful in assigning the IP addresses of the virtual servers in order to avoid conflicts. The easiest way of configuring Virtual Servers is to manually assign a static IP address to each virtual server PC, with an address that does not fall into the range of IP addresses that are issued by the DHCP server. You can configure the virtual server IP address manually, but it must still be in the same subnet as the router.**

## Well-known and Registered Ports

Port Number	Protocol	Description
20	TCP	FTP Data
21	TCP	FTP Control
22	TCP & UDP	SSH Remote Login Protocol
23	TCP	Telnet
25	TCP	SMTP (Simple Mail Transfer Protocol)
53	TCP & UDP	DNS (Domain Name Server)
69	UDP	TFTP (Trivial File Transfer Protocol)
80	TCP	World Wide Web HTTP
110	TCP	POP3 (Post Office Protocol Version 3)
119	TCP	NEWS (Network News Transfer Protocol)
123	UDP	NTP (Network Time Protocol)
161	TCP	SNMP
443	TCP & UDP	HTTPS
1503	TCP	T.120
1720	TCP	H.323
4000	TCP	ICQ
7070	UDP	RealAudio

## Virtual Server / Port Mapping

The screenshot shows the 'Port Mapping' configuration window in the Cerberus P6341 software. The window has a yellow title bar with 'Configuration' on the left and 'CERBERUS P6341' on the right. The main area is titled 'Port Mapping' and contains a 'Parameters' section with the following fields:

- Application:** A text input field followed by a dropdown menu labeled '--select--' and the text '(type or select from listbox)'. The dropdown is currently empty.
- Protocol:** A dropdown menu currently set to 'TCP'.
- External Port:** A text input field followed by a tilde '~' symbol.
- Internal IP Address:** A text input field followed by a dropdown menu labeled '--select--' and the text '(type or select from listbox)'. The dropdown is currently empty.
- Internal Port:** A text input field.
- Time Schedule:** A dropdown menu currently set to 'Always On'.

At the bottom of the 'Parameters' section, there are two buttons: 'Add' and 'Edit / Delete'.

**Application** – Select the service you wish to configure

**Protocol** – Automatic when you choose Application from listbox or select a protocol type which you want.

**External Port / Internal Port** – Enter the public port number & range you wish to configure.

**Internal IP Address** – Enter the IP address of a specific internal server to which requests from the specified port is forwarded.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

Since NAT acts as a “natural” Internet firewall, your router protects your network from access by outside users, as all incoming connection attempts point to your router unless you specifically create Virtual Server entries to forward those ports to a PC on your network. When your router needs to allow outside users to access internal servers, e.g. a web server, FTP server, Email server or game server, the router can act as a “virtual server”. You can set up a local server with a specific port number for the service to use, e.g. web/HTTP (port 80), FTP

(port 21), Telnet (port 23), SMTP (port 25), or POP3 (port 110). When an incoming access request to the router for a specified port is received, it is forwarded to the corresponding internal server.

In addition to specifying the port number used, you also need to specify the protocol used. The protocol is determined by the particular application. Most applications use TCP or UDP, however you can specify other protocols using the drop-down **Protocol** menu. Setting the protocol to "all" causes all incoming connection attempts using all protocols on all port numbers to be forwarded to the specified IP address.

## Virtual Server / DMZ

The DMZ Host is a local computer exposed to the Internet. When setting a particular internal IP address as the DMZ Host, all incoming packets are checked by the Firewall and NAT algorithms, then passed to the DMZ host when a packet received does not use a port number in use by any other Virtual Server entries.

The screenshot shows the 'Configuration' window for the Cerberus P6341 device. The 'DMZ' section is expanded, showing the 'Parameters' table. The 'Internal IP Address' field is currently empty, with a dropdown menu showing '--select--' and a note '(type or select from listbox)'. The 'Time Schedule' is set to 'Always On'. There are 'Apply' and 'Cancel' buttons at the bottom of the configuration area.

Parameters	
Internal IP Address	<input type="text"/> << --select-- (type or select from listbox)
Time Schedule	Always On


**Internal IP Address** – Enter the IP address of a specific internal host to which all external requests is forwarded.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## Wake on LAN

This page allows you to control to which hosts Magic Packet will be forwarded.

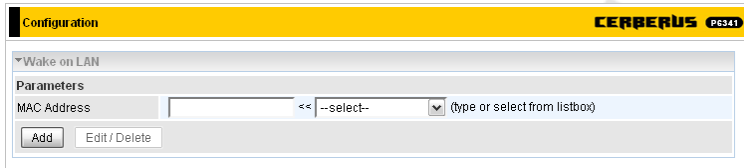

Configuration CERBERUS P6341

Wake on LAN

Parameters

MAC Address  << --select-- (type or select from listbox)

Add Edit / Delete

**MAC Address** – Enter the MAC address you wish to manage.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

## Time Schedule

The Time Schedule supports up to 16 time slots which helps you to manage your Internet connection. In each time profile, you may schedule specific day(s) i.e. Monday through Sunday to restrict or allowing the usage of the Internet by users or applications.

This Time Schedule correlates closely with router's time, since router does not have a real time clock on board; it uses the Simple Network Time Protocol (SNTP) to get the current time from an SNTP server from the Internet. Refer to **System / Time Zone** for details. Your router time should correspond with your local time. If the time is not set correctly, your Time Schedule will not function properly.

Configuration
CERBERUS P6341

**Time Schedule**

**Parameters**

Name  Day in a week  Sun  Mon  Tue  Wed  Thu  Fri  Sat

Start Time  :  End Time  :

Edit	Name	Day in a week	Start Time	End Time	Clear
<input type="radio"/>	TimeSlot1	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot2	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot3	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot4	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot5	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot6	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot7	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot8	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot9	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot10	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot11	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot12	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot13	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot14	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot15	smtwfs	08:00	18:00	<input type="checkbox"/>
<input type="radio"/>	TimeSlot16	smtwfs	08:00	18:00	<input type="checkbox"/>

**Name** – A user-define description to identify this time portfolio.

**Day in a week** – The default is set from Sunday through Saturday. You may specify the days for the schedule to be applied. Selected days on list are displayed in capital letters.

**Start Time** – The default is set at 8:00 (AM). You may specify the start time of the schedule.

**End Time** – The default is set at 18:00 (6:00PM). You may specify the end time of the schedule.

**Edit / Clear** – Click this button to save new values to list item with selected **Edit** field or to clear list items with selected **Clear** field.

## Advanced

### Advanced / Static Route

Configuration CERBERUS P6341				
Static Route				
Parameters				
Destination	Netmask	Gateway	Interface	Cost

Buttons: Add, Edit / Delete

**Destination** – The destination subnet IP address.

**Netmask** – Subnet mask of the destination IP addresses based on above destination.

**Gateway** – The gateway IP address to which packets are forwarded.

**Interface** – Select the interface through which packets are forwarded.

**Cost** – Represents the cost of transmission for routing purposes. The number need not be precise, but it must be between 0 and 65535.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

### Advanced / Static ARP

Configuration CERBERUS P6341	
Static ARP	
Parameters	
IP Address	MAC Address

Buttons: Add, Edit / Delete

Enter **IP Address** and **MAC\_Address** of host which will be added to static ARP table.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

## Advanced / Dynamic DNS

The Dynamic DNS function lets you alias a dynamic IP address to a static hostname, so if your ISP does not assign you a static IP address you can still use a domain name. This is especially useful for hosting servers via your ADSL connection, so that anyone wishing to connect to you may use your domain name, rather than having to use your dynamic IP address, which changes from time to time. This dynamic IP address is the WAN IP address of the router, which is assigned to you by your ISP.

You first need to register and establish an account with the Dynamic DNS provider using their website, for example <http://www.dyndns.org/>

**Dynamic DNS** – Check **Disable** to disable or **Enable** to enable the Dynamic DNS function.

**Dynamic DNS Server** – Select the DDNS service you have established an account with.

**Wildcard** – Select this check box to enable the DYNDNS Wildcard.

**Host** – Enter one domain name you have registered.

**Domain Name, Username and Password** – Enter your registered domain name and your username and password for this service.

**Period** – Set the time period between updates, for the router to exchange information with the DDNS server. In addition to updating periodically as per your settings, the router performs an update when your dynamic IP address changes.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## Advanced / VLAN

VLAN (Virtual Local Area Network) is a group of devices on different physical LAN segments that can communicate with each other as if they were all on the same physical LAN segment. While clients and servers may be located anywhere on a network, they are grouped together by VLAN technology, and broadcasts are sent to devices within the VLAN.

**Configuration** CERBERUS P6341

▼ VLAN

**Parameters**

VLAN Group Name	VLAN ID	Ethernet Port				WLAN	Link VLAN Group to WAN Connection Interface / WAN Tagging
		#1	#2	#3	#4		
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No <input type="checkbox"/>
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No <input type="checkbox"/>
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No <input type="checkbox"/>
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No <input type="checkbox"/>
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No <input type="checkbox"/>
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No <input type="checkbox"/>
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No <input type="checkbox"/>
<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No <input type="checkbox"/>

LAN Tagging

LAN Tagging: Insert or keep VLAN tag of the packets flow through the specific ethernet port.  
WAN Tagging: Insert or keep VLAN tag of the packets flow through the specific Bridged WAN interface.(Only for Bridge)

**VLAN Group Name** – There are eight groups that user can setup by themselves.

**VLAN ID** – Group name ID

**LAN Tagging** – Tagging VLAN ID to the specific VLAN group for Ethernet interface.

**Ethernet port** – Port name of Router

**Link VLAN Group to WAN connection Interface / WAN Tagging** – Select the WAN connection interface that VLAN group link. Select check box to enable WAN Tagging (only for Bridge connections).

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## Advanced / Device Management

The Device Management advanced configuration settings allow you to control your router's security options and device monitoring features.

The screenshot shows the 'Configuration' page for the Cerberus P 6341 router. The 'Device Management' section is expanded, showing the following settings:

Device Management	
<b>Device Host Name</b>	
Host Name	home.gateway
<b>Embedded Web Server</b>	
HTTP Port	80 (The default HTTP port number is 80.)
Expire to auto-logout	9999 min(s)
<b>Universal Plug and Play (UPnP)</b>	
UPnP	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
UPnP Port	2800
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

### Device Host Name

**Host Name** – Router's name for identification purposes.

### Embedded Web Server

**HTTP Port** – The port number of the router's embedded web server (for web-based configuration uses). The default value is the standard HTTP port, 80. You may specify an alternative if, for example, you are running a web server on a PC within your LAN.

**Expire to auto-logout** – Time after which user will be automatically logged out.

**For Example:** User A changes HTTP port number to **100**, specifies their own IP address of **192.168.1.55**, and sets the logout time to be **10** minutes. The router only allows User A access from the IP address **192.168.1.55** to logon to the Web GUI by typing: `http://192.168.1.100:100` in their web browser. After 10 minutes, the device automatically logs out User A.

### Universal Plug and Play (UPnP)

UPnP offers peer-to-peer network connectivity for PCs and other network devices, along with control and data transfer between devices. UPnP offers many advantages for users running NAT routers through UPnP NAT Traversal, and on supported systems makes tasks such as port forwarding much easier by letting the application control the required settings, removing the need for the user to control advanced configuration of their device.

Both the user's Operating System and the relevant application must support UPnP in addition to the router. Windows XP and Windows Me natively support UPnP (when the component is installed), and Windows 98 users may install the Internet Connection Sharing client from Windows XP in order to support UPnP. Windows 2000 does not support UPnP.

**Note: For security reasons (Flash UPnP attack) UPnP is disabled by default.**

**Disable** – Check to disable the router's UPnP functionality.

**Enable** – Check to enable the router's UPnP functionality.

**UPnP Port** – The default setting is 2800. It is highly recommended that you use this port value. If the value conflicts with other ports already in use you may wish to change the port.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## Advanced / IGMP

IGMP, known as Internet Group Management Protocol, is used to management hosts from multicast group.

Configuration		CERBERUS P6341	
▼ IGMP			
Parameters			
IGMP Proxy	<input type="radio"/> Enable	<input checked="" type="radio"/> Disable	
IGMP Snooping	<input type="radio"/> Enable	<input checked="" type="radio"/> Disable	
<input type="button" value="Apply"/>		<input type="button" value="Cancel"/>	

**IGMP Proxy** – Accepting multicast packet. Default is set to **Disable**.

**IGMP Snooping** – Allowing switched Ethernet to check and make correct forwarding decisions. Default is set to **Enable**

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

## Advanced / SNMP Access Control

Simple Network Management Protocol software on a PC within the LAN is required to use this function.

Configuration		CERBERUS P6341	
▼ SNMP Access Control			
Parameters			
SNMP	<input checked="" type="radio"/> Enable	<input type="radio"/> Disable	
SNMP V1 and V2			
Read Community	cerberus	IP Address	
Write Community	cerberus	IP Address	
SNMP V3			
Username		Password	
<input type="button" value="Apply"/>		<input type="button" value="Cancel"/>	

### Parameters

**SNMP** – Enable or Disable SNMP.

### SNMP V1 and V2

**Read Community** – Specify a name to be identified as the Read Community, and an IP address. This community string is checked against the string entered in the configuration file. Once the string name is matched, you can obtain this IP address and are able to view the data.

**Write Community** – Specify a name to be identified as the Write Community, and an IP address. This community string is checked against the string entered in the configuration file. Once a string name is matched, users from this IP address are able to view and modify data.

**SNMP V3**

Specify a name and password for authentication, and define access rights from the identified IP address. Once authentication has succeeded, users from this IP address are able to view and modify data.

**Apply** – Click this button to apply changes made on this screen.

**Cancel** – Click this button to discard changes made on this screen.

**SNMP Version: SNMPv2c and SNMPv3**

SNMPv2c is the combination of the enhanced protocol features of SNMPv2 without the SNMPv2 security. The "c" comes from the fact that SNMPv2c uses the SNMPv1 community string paradigm for "security" but is widely accepted as the SNMPv2 standard.

SNMPv3 is a strong authentication mechanism with fine granularity for remote monitoring.

Traps supported: Cold Start, Authentication Failure.

**The following MIBs are supported:****From RFC 1213 (MIB-II):**

- ✓ System group
- ✓ Interfaces group
- ✓ Address Translation group
- ✓ IP group
- ✓ ICMP group
- ✓ TCP group
- ✓ UDP group
- ✗ EGP (not applicable)
- ✓ Transmission
- ✓ SNMP group

**From RFC1650 (EtherLike-MIB):**

- ✓ dot3Stats

**From RFC 1493 (Bridge MIB):**

- ✓ dot1dBase group
- ✓ dot1dTp group
- ✓ dot1dStp group (if configured as spanning tree)

**From RFC 1471 (PPP/LCP MIB):**

- ✓ pppLink group
- ✗ pppLqr group

**From RFC 1472 (PPP/Security MIB):**

- ✓ PPP Security Group)

**From RFC 1473 (PPP/IP MIB):**

- ✓ PPP IP Group

**From RFC 1474 (PPP/Bridge MIB):**

- ✓ PPP Bridge Group

**From RFC1573 (IfMIB):**

- ✓ ifMIBObjects Group

**From RFC1695 (atmMIB):**

- ✓ atmMIBObjects

**From RFC 1907 (SNMPv2):**

- only snmpSetSerialNo OID

## Advanced / Remote Access

### Remote Access Control

**Enable** – Select **Enable** to allow management access from remote side (mostly from internet).

**Duration** – Set how many minutes to allow management access from remote side. Zero means always on.

**Apply** – Click this button to apply changes made on this screen.

### Allowed Access IP Address Range

**Valid** – Select **Valid** to allow remote management from these IP ranges.

**IP Address Range** – Specify what IP address to be allowed to access device from remote side.

**Add** – Click this button to add new item to the list.

**Edit / Delete** – Click this button to save new values to list item with selected **Edit** field or to delete list items with selected **Delete** field.

## **Troubleshooting**

If the router is not function properly, first check this session for simple troubleshooting before contacting your Internet service provider (ISP) for support.

### **Using LEDs to Diagnose Problems**

The **LEDs** are useful aides for finding possible problem causes.

#### **Power LED**

The **Power LED** on the front panel does not light up.:

1. Make sure that the power adaptor is connected to the router and plugged in to an appropriate power source. Use only the supplied power adaptor;
2. Check that the router and the power source are both turned on and the router is receiving sufficient power;
3. Turn the router off and on;
4. If the error persists, you may have a hardware problem. In this case, you should contact your vendor.

#### **Ethernet LEDs**

The **Ethernet LED** on the front panel does not light up.:

1. Check the Ethernet cable connections between your router and the computer or hub;
2. Check for faulty Ethernet cables;
3. Make sure your computer's Ethernet card is working properly;
4. If these steps fail to correct the problem, contact your local distributor for assistance.

#### **DSL / Internet LED**

The DSL and/or Internet LED on the front panel does not light up:

1. **ADSL** Check the telephone wire and connections between the router ADSL port and the wall jack;  
**EWAN** Check cable between router and ISPs access device and connections between access device and signal line; make sure that Ethernet 1 port is used for connection with access device;
2. **ADSL** Make sure that the telephone company has checked your phone line and set it up for ADSL service;  
**EWAN** Make sure that ISP setup line for Internet service;
3. **ADSL** Reset your ADSL line to reinitialize your link to the DSLAM;  
**EWAN** Reset your access device;
4. If these steps fail to correct the problem, contact your local distributor for assistance.

## ***Problems with the Web Interface***

I cannot access the web interface:

1. Make sure you are using the correct IP address of the router. Check the IP address of the router;
2. Your computer's and the router's IP addresses must be on the same subnet for LAN access;
3. If you changed the router's LAN IP address, then enter the new one as the URL;
4. Remove any filters in LAN or WAN that block web service.

## ***Problems with the Login Username and Password***

I forgot my login username and/or password:

1. The default username is "**admin**". The default password is "**pentagram**". The Password and Username fields are case-sensitive. Make sure that you enter the correct password and username using the proper casing;
2. Press the RESET button for 10-12 seconds, and then release it - the defaults have been restored and the router restarts;

## ***Problems with LAN Interface***

I cannot access the router from the LAN or ping any computer on the LAN:

1. Check the Ethernet LEDs on the front panel. A LAN LED should be on for a port that has a PC connected. If it is off, check the cables between your router and the PC. Make sure you have uninstalled any software firewall for troubleshooting;
2. Make sure that the IP address and the subnet mask is consistent between the router and the workstation.
3. In EWAN mode Ethernet 1 port is used as WAN port and computer connected to this port won't work in local network.

## ***Problems with WAN Interface***

Initialization of the ADSL connection failed:

1. Check the cable connections between the ADSL port and the wall jack. The ADSL LED on the front panel of the router should be on;
2. Check that your VPI, VCI and type of encapsulation settings are the same as what you collected from your telephone company and ISP;
3. Restart the router. If you still have problems, you may need to verify your VPI, VCI and type of encapsulation settings with the telephone company and ISP.

I cannot get a WAN IP address from the ISP:

1. Ensure that all other devices connected to the same telephone line as your router (e.g. telephones, fax machines, analogue modems) have a line filter connected between them and the wall socket (unless you are using a Central Splitter or Central Filter installed by the qualified and licensed electrician), and ensure that all line filters are correctly installed and right way around;
2. Missing line filters or line filters installed the wrong way around can cause problems with your ADSL connection, including causing frequent disconnects.

Frequent loss of ADSL line sync (disconnections):

1. The ISP provides the WAN IP address after authenticating you. Authentication may be through the user name and password, the MAC address or the host name;
2. The username and password apply to PPPoE and PPPoA connections only. Make sure that you have entered the correct **Service Name**, **Username** and **Password** (be sure to use the correct casing).

## ***Problems with the Internet Access***

I cannot access the Internet:

1. Make sure the router is turned on and connected to the network;
2. If the DSL and/or Internet LED is off, refer to Section **DSL / Internet LED** of this troubleshooting;
3. Verify your WAN settings;
4. Make sure you entered the correct user name and password;
5. For wireless stations, check that both the router and wireless station(s) are using the same ESSID, channel and encryption keys (if encryption is activated).

Internet connection disconnects:

1. If you use PPPoA or PPPoE encapsulation, check the idle time-out setting;
2. Contact your ISP.

If you have any troubles to configure or setup this ADSL Ethernet Router, please feel free to contact us.



